

MF 5M

95–145 HP

AFFORDABLE EFFICIENCY



Overseas model shown. Specifications, features, and availability may vary by model and region.



MASSEY FERGUSON

BORN TO **FARM**

MF 5M

SETTING A NEW STANDARD FOR AFFORDABLE EFFICIENCY

Massey Ferguson takes pride in developing innovative and practical machines to meet the continuing challenges facing farmers.


The new MF 5M Series builds on this renowned legacy, delivering high performance and efficiency, while retaining the fundamental values of robust, easy operation, dependability and low cost of ownership.

With their strong design and new styling, including the grey sabre and diamond grey cab, these new tractors provide you with a choice of power outputs from 95 hp to 145 hp and are versatile workhorses, as well as making an efficient loader partner. They have the power and features to also excel in the field with factory-fitted functions and Smart Farming solutions available, easing the workload on operators while increasing performance.



THE POWER TO TACKLE ANY TASK

8

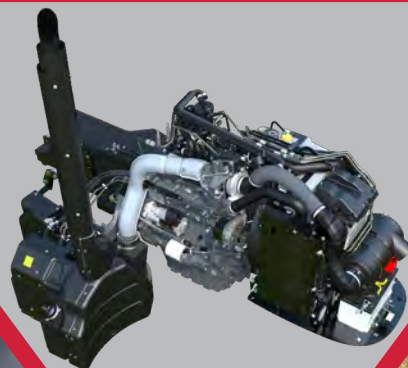

THE EFFICIENT LOADER PARTNER

16



06

YOUR WELCOMING WORKPLACE

Your MF 5M at a glance	4
Your welcoming workplace	6
More power to tackle any task	8
Proven Dyna-4 transmission	10
Power any implement for any application	12
Simple and efficient hydraulic system	14
Operate your loader the Massey Ferguson way	16
Ready for Smart Farming	18
Parts & service	22
Options & specifications	26

10

PROVEN TRANSMISSION



14

HYDRAULIC SYSTEM



YOUR MF 5M AT A GLANCE

WITH THIS NEW AND STRAIGHTFORWARD RANGE, MASSEY FERGUSON OFFERS A HIGHLY CAPABLE, HEAVY-DUTY TRACTOR THAT DELIVERS AFFORDABLE EFFICIENCY FOR EVERY TYPE OF FARMER.

The MF 5M Series - which includes six tractors from 95 hp up to the new, top 145 hp model - is equipped with a level of comfort operators expect, plus a four-cylinder engine and the well-proven Dyna-4 transmission along with Brake-to-Neutral.

The new electronic architecture offers ISOBUS connectivity, MF Guide and a wide range of other Smart Farming options, while still retaining the straightforward, robust design. These modern factory-fitted additions, typically found on larger, more complex tractors, further enhance the versatility, reduce the operator workload and increase field performance and efficiency.

Options expand versatility

- ▶ Wide choice of loaders
- ▶ Optional Visio Roof for perfect high-level visibility
 - ▶ Choice of mechanical or electrical joystick
 - ▶ Tight, 4.65 m turning radius

Low operating costs

- ▶ 'All-in-One' AGCO Power engine SCR system cuts ownership costs and improves visibility
- ▶ Easy access for daily maintenance
- ▶ MF Care repair and maintenance contract schemes

WITH 6 MODELS TO CHOOSE FROM, THE MF 5M SERIES IS ALWAYS THE RIGHT CHOICE.

	MF 5M.95	MF 5M.105	MF 5M.115	MF 5M.125	MF 5M.135	MF 5M.145
Engine	AGCO Power – Tier 3 – All-in-One technology					
Engine capacity	4 cylinder, 4.4 litre					
Transmission	12x12 Synchro	12x12 Synchro	or	Dyna-4 (Cab Only)	Dyna-4 (Cab Only)	
Max power @ 2,000 rpm (hp)	95	105	115	125	135	145
Max torque @ 1,500 rpm (Nm)	405	440	460	520	545	560



Comfortable and ergonomic workplace

- ▶ Spacious cab that delivers comfort and visibility, with an optional air conditioning system increasing air flow and distribution around the operator
- ▶ The 1.3 m wide operator environment has a completely flat floor and car-style pedals. A large glass area and compact 'All-in-One' SCR system, provides optimum visibility
- ▶ Comfort is further improved thanks to an optional new cab suspension, for higher shock absorption
- ▶ New LED worklight options, in addition to the halogen lights, provide even more illumination for safe night work

Built for hard work

- ▶ The MF 5M Series is equipped with rugged rear axles. The robust three point linkage, with Electronic Linkage Control, offers an impressive maximum lift capacity of up to 5,200 kg, enabling them to handle demanding equipment

The key to efficient and effective operations

- ▶ Plenty of hydraulic flow and power is delivered by the straightforward open-centre, two gear pump system. One pump supplies 32 litres/min to the internal circuits, while the other delivers 58 litres/min to the up to 5,200 kg capacity electronically-controlled rear linkage
- ▶ Standard 100 litres/min combined flow system meets the highest hydraulic demands, such as for loader work

Dyna-4 transmission offers optimum control

- ▶ Proven for more than 20 years, Dyna-4 provides class-leading, clutch-free control of 16 forward and 16 reverse speeds with a 40 km/h Eco top speed
- ▶ Optional AutoDrive offers automatic shifting in Power and Eco modes, along with Brake-to-Neutral, which automatically disengages drive when the brake pedal is pressed

YOUR WELCOMING WORKPLACE

With its spacious ergonomic cab, the MF 5M Series offers the comfort and ease of use to make hard work a pleasure.

With its renewed design, the MF 5M provides the right level of control and automation with electro-hydraulic activation of the four-wheel drive and the diff-locks.

The cab suspension option further enhances comfort, greatly increasing operator well-being during long working days. The mechanical system uses two silent block bushes to support the cab at the front and spring-assisted shock absorbers on the rear corners.

The updated, air conditioning system*, greatly increases air flow and distribution around the operator.

For even greater convenience, you can choose from a number of factory-fitted features, such as mechanical or electric joystick for loader operations.

* cab models only



1300 mm PILLAR TO PILLAR WIDTH

externally compact yet exceedingly roomy inside with wide access on both sides.



VISIBILITY

for optimum comfort and safety at work.



EFFICIENT ERGONOMICS

everything you need is exactly where you would expect it to be. All controls are at your fingertips, enabling precise and easy operations.

- 1 **Easy shuttling**
The Power Control lever offers fingertip control direction changes.
- 2 **The Advanced Dashboard** displays engine and PTO speeds, service intervals, fuel consumption, distance travelled, area worked, oil temperature and tractor hours, engine memorised speed and service information.
- 3 **Unrivalled 360° visibility**
The large window ensures optimum efficiency and safety.
The compact 'All-in-One' SCR system offers the driver visibility for optimum comfort and safety at work.
- 4 **Loader joystick**
Optional electronic multifunction joystick (transmission and hydraulics controls) or mechanical loader joystick.
- 5 **All in the right place**
The right-hand pillar houses less frequently used switches that are still an integral part of the working day. Here you will find the work lights, the rear windscreen wiper, the ELC panel and the starter key.
- 6 **Spool valves**
Up to three valves handle most operations.
- 7 **Hand throttle**
- 8 **Differential lock and 4 wheel drive switches**
- 9 **Engine speed memory**
- 10 **Gear-shift switch +/-**
- 11 **Electronic linkage control**
- 12 **Linkage depth control**



1

2

3

4

7

6

8

9

12



11

10

5


MORE POWER TO TACKLE ANY TASK

Renowned for its rugged reliability and fuel economy, the 4.4 litre AGCO Power four-cylinder engine is the heart of the MF 5M Series. Delivering 95 hp to 145 hp it meets the strictest emissions regulations thanks to its award-winning All-in-One system.

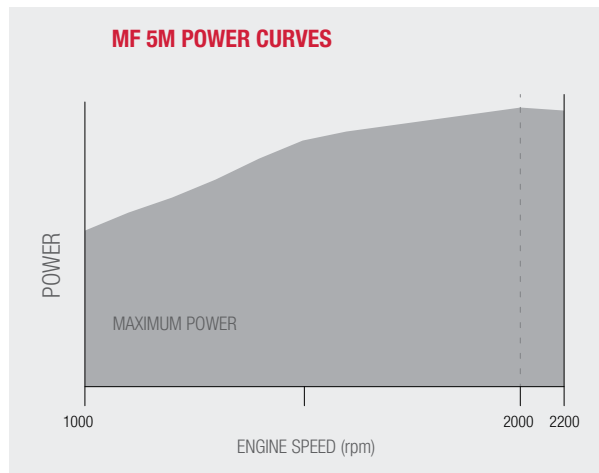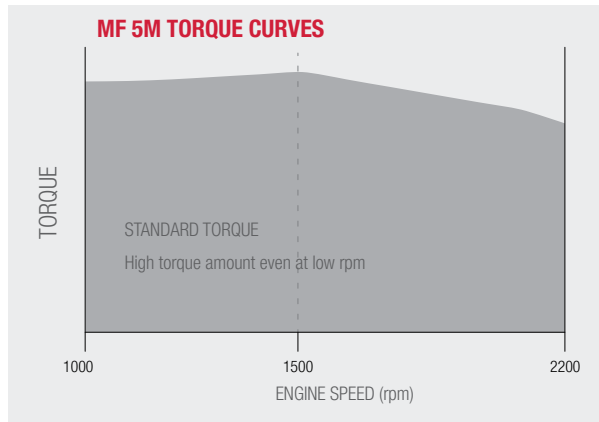


COMMON RAIL FUEL SYSTEM

State of the art common rail fuel system offers optimised injection pressures even at low engine speeds.

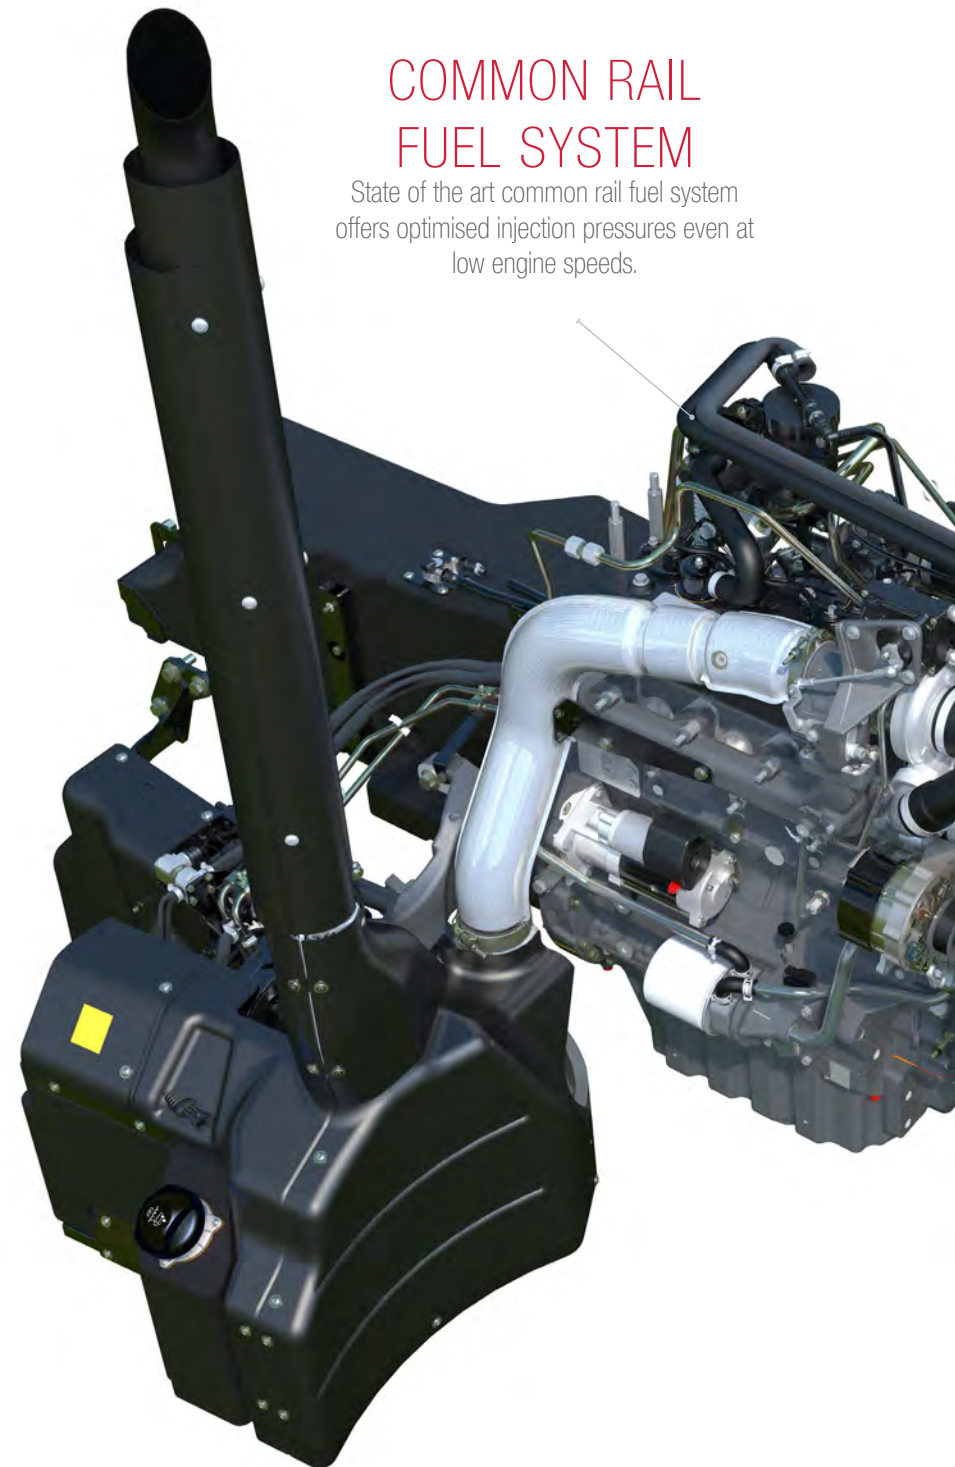

FRUGAL ON FUEL **LOW ON NOISE**

The long stroke design of the engines powering the MF 5M Series tractors provides high levels of torque across a broad speed range. Maximum torque is achieved at low engine speeds of just 1,500 rpm across all models. This not only cuts fuel consumption, but also reduces noise and wear, which results in lower running costs and a more pleasant operator experience.

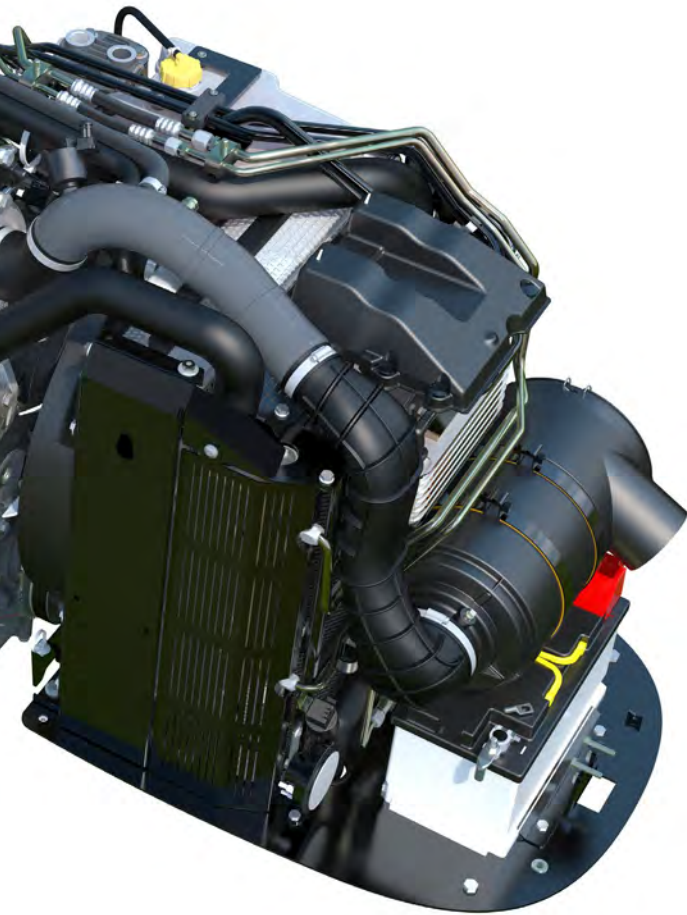

"ALL-IN-ONE" SCR TECHNOLOGY

The 'All-in-One' system only needs an occasional 'regeneration', which doesn't require separate diesel injection system or extra fuel. The driver is in total control of the process, choosing when to operate the system using a switch in the cab.

Overseas model shown. Specifications, features, and availability may vary by model and region.

UNRIVALLED **VISIBILITY**


With the compact "All-in-One" system tucked neatly under the cab, it maintains the perfect all-round visibility for optimum work quality and safety.



PROVEN DYNA-4 TRANSMISSION

- ▶ Exceptional performance in the yard, field or on the road – 16 forward and 16 reverse speeds* on one lever, all shifted without using the clutch. Speedmatching selects the best dynashift ratio when shifting range
- ▶ Ultimate ease of use with left-hand Power Control lever or T-Lever
- ▶ Convenient loader operation, with Comfort Control to set smooth or rapid shuttling
- ▶ Brake pedal puts transmission in neutral
- ▶ Eco-mode to drive at 40 km/h at 1,850 rpm
- ▶ Electric joystick is available as a factory-fitted option for more precision

*On the Dyna 4 models

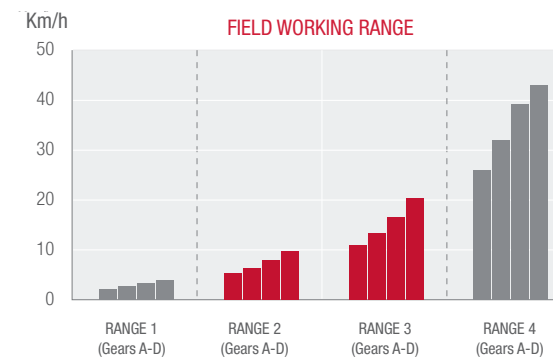

The exclusive **Power Control** lever provides convenient three in-one, straightforward operation. Operators can shuttle between forward/reverse or select neutral, leaving the right hand free to operate the loader or implement hydraulics.



Simply move the **T-shaped transmission control lever** forwards or backwards to change up or down through the four Dynashift ratios. To change range, simply press the range selection button as you move the lever. Not available with electric joystick.



Smooth or quick shuttling – you choose by simply adjusting the **Comfort Control** to suit the job – slow and smooth or fast and efficient.



The MF 5M can also be specified with an **electric joystick**, ideally located on the seat armrest, for precise operation of a front loader or other specific equipment. It also controls external 3rd hydraulic service functions, travel direction shuttling, and the engine speed memory. You will greatly appreciate the extra precision for handling work, as well as the added convenience and comfort from the integrated joystick on the armrest.



AutoDrive (option) provides automatic shifting and operates in two modes:

- ▶ **AutoDrive Power mode:**
Powershift changes at 2,050 rpm
- ▶ **AutoDrive Eco mode:**
Powershift changes at 1,700 rpm



Close control in specialist low-speed tasks is assured with **additional creeper gears**, enabling forward speeds as low as 100 m/h to be achieved.



Brake to Neutral switch (option) simultaneously operates the clutch as soon as the brake pedal is pressed. This eases the load on the operator, while increasing efficiency and convenience and is particularly useful for loader operations.

POWER ANY IMPLEMENT FOR ANY **APPLICATION**

The key to efficient and effective operations is to select a tractor that can easily handle modern equipment and operate them at their full potential in a wide range of agricultural applications.



Overseas model shown. Specifications, features, and availability may vary by model and region.



Overseas model shown. Specifications, features, and availability may vary by model and region.

“To enhance productivity, you need to choose a reliable tractor; adaptable for all implements, ensuring optimal performance in various applications.”



SIMPLE AND EFFICIENT HYDRAULIC SYSTEM

A STRAIGHTFORWARD, OPEN-CENTRE

HYDRAULIC SYSTEM is powered by two gear pumps. One provides 42 litres/min to all the internal services, while another delivers 58 litres/min to the electronically-controlled rear linkage, enabling it to lift up to 5,200 kg.

At the press of a button the MF 5M Series hydraulics can deliver 100 litres/min oil flow, making the higher flowrate available to provide extra speed and power for loader operations.



External fender controls, including PTO, makes it convenient for lifting/lowering of the rear linkage when attaching or detaching rear-mounted implements.



Up to

3

auxiliary spool valves
2 valves as standard, with a
3rd as an option.



Up to

5,200 KG

Boasting an impressive lift capacity of 4,300 kg, on the MF 5M.95, MF 5M.105 and MF 5M.115 models, and 5,200 kg on the MF 5M.125, MF 5M.135 and MF 5M.145 models, the rear linkage handles heavy-mounted equipment with ease.

The MF 5M series benefits from the industry-leading Electronic Linkage Control (ELC) system.





3-SPEED PTO

The MF 5M Dyna-4 variants are equipped with a 3 speed 540/540E/1000 rpm PTO as standard on Dyna4 Models (and exists an optional upgrade for 12x12 models from the 540/540E). A 21-spline shaft is an option with the 1000 rpm PTO. Control is via a modern independent PTO (IPTO) clutch, which is engaged electro-hydraulically and 'eases' the engagement to protect the driveline by gradually taking up the drive. This well-proven control system combines upmost reliability with ease of use and is controlled simply using a three-position rocker-switch on the operator station.

RUGGED REAR AXLE



Overseas model shown. Specifications, features, and availability may vary by model and region.

THE HEAVY DUTY, STRUCTURAL AXLE CASTING DESIGN CONTAINS INBOARD REDUCTION UNITS, which employ epicyclic gears for the final speed reduction. These amplify torque to ensure maximum engine power is transmitted to the ground for the upmost traction and performance.

All models are equipped with oil-immersed multi-disc brakes, mounted at the in-board side of the axle for the highest braking efficiency on the shafts.

OPERATE YOUR LOADER THE MASSEY FERGUSON WAY

The MF 5M Series offers ease of use and comfort, particularly for tasks requiring a front loader. Fully compatible from the factory with Massey Ferguson's MF FLX & MF FL Series loaders, the MF 5M Series benefits from a tight, 4.65 m turning radius and offers excellent manoeuvrability, plus a choice of mechanical or electronic joystick to meet your requirements. The Visio Roof option provides outstanding visibility for stacking bales or loading trailers, with sun-protected glass keeping operators cool and safe.

Model	SELF LEVELLING			NON SELF LEVELLING
	FL.3717X (X Series)	FL.3919X (X Series - AU only)	FL.4018 (Professional)	FL.3723 (NZ only)
Maximum lift height - measured at pivot pin	3.7	3.9	4.02	3.79
Maximum dump angle at maximum height	49	46	54	58
Maximum rollback angle at ground level	42	43	49	48
Lift capacity to maximum height - 800 mm pivot pin	1,590	1,680	1,780	1,290
Lift capacity to 1,5 m height - 800 mm pivot pin	1,710	1,890	1,820	1,720
Breakout force - 800 mm pivot pin	1,850	2,080	1,910	1,850
Rollback force at ground level - 800mm from pivot pin	2,280	2,740	3,400	3,420
Digging depth	150	150	180	160

THE EFFICIENT LOADER PARTNER



- ▶ Mechanical loader joystick option is designed specifically for use with these tractors
- ▶ Electronic multifunction joystick, available as an option, allows operators to control the loader function as well as the transmission forward, reverse and powershift at the same time without taking your hand off the steering wheel, for optimum accuracy, productivity and safety at work
- ▶ Comfort Control allows operators to set how it responds – slow and smooth – or fast and efficient
- ▶ For faster hydraulic connection, a quick coupling system is available as an option from the factory
- ▶ Brake to Neutral allows operators to engage neutral whenever the brakes are depressed. Therefore, it enhances and eases loader operation as the operator needs to use only one pedal to brake and de-clutch at the same time
- ▶ Operators benefit from superb visibility thanks to the slim bonnet and dash profiles
- ▶ Optional Visio Roof improves the view of the load throughout the lifting range with Falling Object Protection (FOPS)
- ▶ All models are available with a factory-fitted loader subframe option for optimum performance
- ▶ A flexible range of factory-fitted loaders for a wide variety of applications
- ▶ High Hydraulic Flow: Standard 100litres/min combined flow
- ▶ Excellent manoeuvrability including tight 4.65 m turning radius (until model MF 5M.115) and rapid response from engine and hydraulics
- ▶ Optimum and easy access to maintenance operation

MECHANICAL JOYSTICK

Joystick main functions:

- A. Lift
- B. Lower
- C. Fill
- D. Dump
- E/C/D. 3rd function
- F. Loader suspension


ELECTRONIC JOYSTICK

- A. Lift
- B. Lower
- C. Fill
- D. Dump
- E. 3rd function - close grab
- F. 3rd function - open grab

ELECTRONIC JOYSTICK



MECHANICAL JOYSTICK

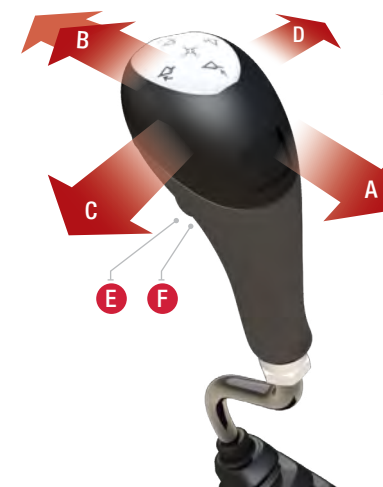

RTK ASSIST PRO TECHNOLOGY

Should you lose your signal to the terrain, MF Guide continues to work reliably and infinitely without a correction signal thanks to Trimble® RTK Assist PRO technology.



READY FOR SMART FARMING

One of the major innovations of the MF 5M series is its technology.

You can now benefit from the Massey Ferguson Technology package available as a factory-fitted option. These practical and more sustainable solutions are a powerful ally for modern farming, ensuring versatility, efficiency, and ease of use.

MFguide


MADE TO KEEP YOU ON TRACK

ACCURACY, PRODUCTIVITY, VERSATILITY, COMFORT

MF Guide is Massey Ferguson's full featured, hands-free steering system. MF Guide can deliver sub-metre, decimetre and centimetre accuracy, increasing the efficiency of your farming operations.



With MF Guide, there are now two different receiver systems available: Trimble® and NovAtel®.

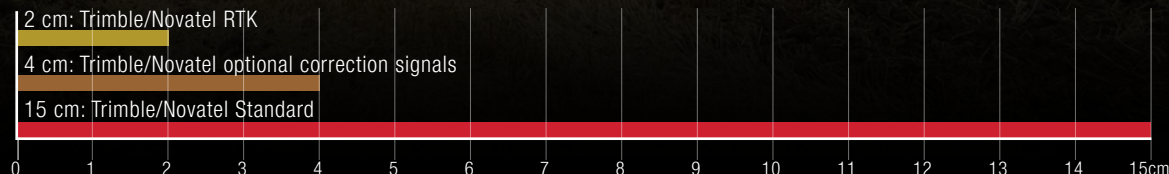

RTK Corrections

EASY, FAST SET-UP WITH GO MODE FUNCTION

You can start using MF Guide in just one minute, in three easy steps :

- 1) Install or select the stored tool
- 2) Define your wayline
- 3) Go!



MFsection control

ENJOY ACCURACY, WORK BETTER

MF Section Control delivers optimum accuracy by avoiding overlaps and gaps, ensuring products are applied precisely and only onto the target.

Using GPS position information from MF Guide, MF Section Control precisely locates the machine and can automatically control up to 96 sections on ISOBUS compliant implements (TC-SC). Straightforward and easy to use with manual and auto modes, it automatically turns sections on and off to apply inputs with ultimate accuracy.



MFrate control

OPTIMISE APPLICATION RATES

MF Rate Control automatically varies the application rates applied by ISOBUS compatible implements in response to instructions from prescription maps. Working in conjunction with MF Section Control, it offers the possibility to control up to 5 different products through 3 booms simultaneously, to precisely applying the correct quantity of seeds, fertilisers or sprays according to instructions on the prescription map. This lowers input costs and enhances yields.




MFtask doc

RECORD & TRANSFER DATA REMOTELY AND EASILY

MF TaskDoc™ records data quickly and easily to create field records, make job reports and keep accurate records of inputs.

The MF TaskDoc™ system has a real place in the future of agriculture, helping farmers to become more productive through the knowledge brought by putting precision-measured data at the business owner's fingertips.

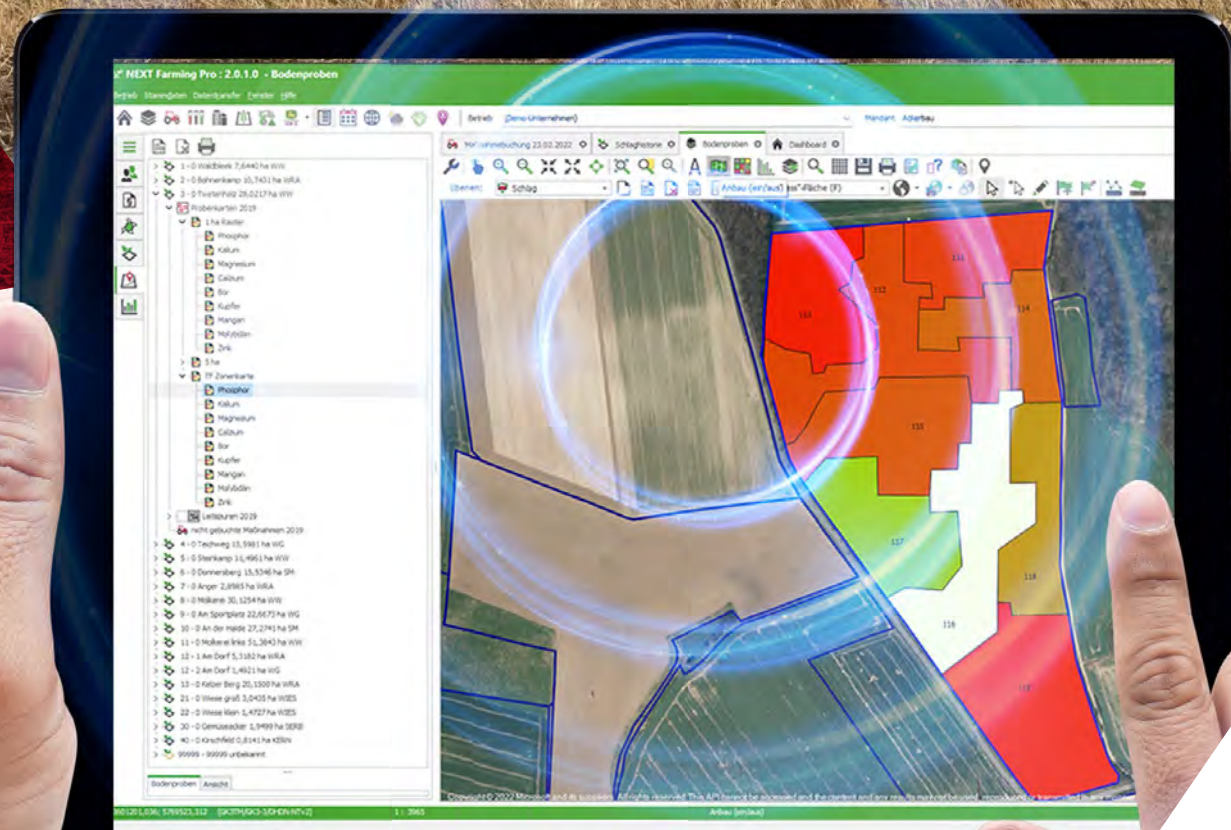



ISOBUS ULTIMATE IMPLEMENT INTERACTION

Fieldstar5 enables ISOBUS-compatible implements through the Universal Terminal (UT) and automatically manages up to 96 sections via the Task Controller (TC-SC). The latter automatically generates all the necessary georeferenced data (TC-GEO), managed through ISOXML and shape-file format (TC-BAS).




MFconnect

CONNECTED
**ANYTIME.
ANYWHERE.**

GREATER UP-TIME,
OPTIMISED MAINTENANCE
AND SMARTER SERVICES
WITH MF CONNECT

MF Connect is the central telemetry solution helping operators to manage their entire fleet of MF machines. With MF Connect, machine data is collected and evaluated, so farmers and contractors can monitor, analyse and optimise the condition and use of their machines, their efficiency and minimise downtime. Real time machine data can be retrieved anywhere, from the office, desktop, a tablet or a smartphone, thanks to the Mobile Data transmission..

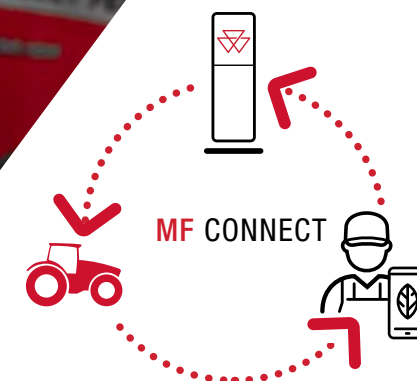

OWNER, DEALER AND
MACHINE ARE 100%
CONNECTED!

PARTS & SERVICE

IT'S ALL ABOUT A LIFETIME OF SUPPORT

Buying, owning and maintaining farm machinery can be complex, so having absolute peace of mind that you have great back-up and support is a hugely important consideration. As a Massey Ferguson customer you are assured of personalised, responsive and friendly support from our network of expert dealers who truly understand your business.

There's no cut-off time for Parts and Service because a machine may be out of service. We're available to you throughout your ownership of your Massey Ferguson machine.

We take great pride and responsibility in every machine we sell and we make it our mission to keep your machinery running reliably, every time you turn the key.

Overseas model shown. Specifications, features, and availability may vary by model and region.



THE MF 5M HAS BEEN DESIGNED TO PROVIDE FAST, STRAIGHTFORWARD, EASY AND COST-EFFECTIVE ROUTINE MAINTENANCE.

We have combined practicality with style to ensure daily maintenance is speedy, straightforward and simple, taking the stress out of maintaining your tractor, getting you to the field earlier for greater productivity and giving you some free time. With a Massey Ferguson MF 5M Series tractor, time spent in the yard preparing for the day ahead is kept to a minimum.



Engine air filter is easy to access and clean.



Front axle and slim waist bonnet design make oil dipstick and filter access easy.

OPTIONS & ACCESSORIES

Make the MF 5M your own. Designed to tailor your Massey Ferguson machine to your needs, we offer a wide range of options and accessories, e.g. loaders, weights, extra spool valves or hydraulic flowrates.

Everything we offer has been scrutinised by our engineers from all perspectives – optimum compatibility with your machine, safety, durability and performance. You'll get expert service from your Massey Ferguson dealer who has all the necessary installation tools and knowledge at their fingertips.



Easy access to remove the cab air filter for cleaning.



Cooling package is easily accessible to make cleaning faster and easier.



THE
PERFECT
FIT

PARTS AND SERVICE

FROM THE MOMENT YOU PURCHASE YOUR
MASSEY FERGUSON MACHINE YOU ARE
SUPPORTED BY THE EXPERTISE OF OUR

AFTERSALES TEAM.

Always by your side to help maximise your
profits and efficiency.

Supplying everything you need for your
machine to perform at its best.





YOUR MACHINE EXPERTS

You can rely on your Massey Ferguson Dealer for servicing, maintenance and repairs. And trust their advice on the latest smart farming solutions, innovative accessories and replacement parts.

Your Massey Ferguson Dealer will supply you with all the farming essentials you need from lubricants to batteries, and care kits.

With skilled technicians and expert staff, our dealers pride themselves on always delivering excellent customer service.



GENUINE PARTS, GENUINE VALUE

Premium quality parts with best-in-class availability, AGCO Genuine Parts offer excellent value. Engineered to be the perfect fit for your Massey Ferguson. Designed to safeguard your machine value and protect your uptime.

AGCO Parts are covered by a 12-month warranty, including labour when fitted by a Massey Ferguson Dealer.



AGCO FINANCE


YOUR PARTNER TO GROW YOUR BUSINESS.

As the financial services provider for Massey Ferguson, we help you obtain your MF equipment through our tailored finance solutions, enabling usage or ownership of the world's best agriculture equipment.

Full Reliability: 30+ years of agricultural industry experience around the globe.

Full convenience: Conveniently available through your local MF Dealer.

Full Partnership: We are with you along the way, through your entire business cycle.



MASSEY FERGUSON COLLECTION

NOW YOU CAN LOOK AS STYLISH AS YOUR MASSEY FERGUSON.

We have an exclusive range of high quality products to suit you, your farming activity, your family and your lifestyle.

To find out what we have available please login into our online Shop:

Shop.MasseyFerguson.Com

For the above support packages, country terms and conditions apply. Please note all packages may not be available in all markets.

Please check with your local MF Dealer/Distributor.

MAKE THE MF 5M YOUR OWN

	5M.95	5M.105	5M.115	5M.125	5M.135	5M.145
Platform/Cab	Platform/Cab				Cab	
Engine						
AGCO POWER 4 cylinders, Turbo, Common rail						
Memorised engine speed						
Transmission						
12 x 12 Synchro	-					
Dyna-4 16×16	-					
Powershuttle						
Comfort Control						
Power Control (Dyna-4 models only)	-					
Brake to neutral						
AutoDrive						
Creeper						
Large cab flat floor (2 doors, easy access)						
Suspended Large cab flat floor (2 doors, easy access)						
Rear Side Fender Extensions (100mm)						
Rear Wide Side Fender Extensions (250mm)						
Air conditioning*						
Viso roof for loader operations*						
Dual Adjustment Steering Column (Tilting & Telescopic)						
Mechanical seat						
Passenger seat*						
Radio, MP3, Equaliser, Bluetooth®, USB, SD & Front Aux						
Roof worklights (front & rear)						
Additional handrails worklights						
2 rear view telescopic mirrors*						
Advanced performance monitor						
Toolbox						


*Cab only

	5M.95	5M.105	5M.115	5M.125	5M.135	5M.145
Platform/Cab	Platform/Cab				Cab	
Hydraulics						
100 l/min Open Circuit - Combined Flow						
2 Mechanical spool valves						
3 Mechanical spool valves						
Advanced linkage control (intermix / max height / quick soil engagement / shock absorber)						
Linkage control on fenders, both sides						
PTO						
Independent PTO						
Electro hydraulic PTO clutch						
In cab PTO speed selection						
Front axle						
4WD						
Electro hydraulic diff lock						
Front fenders						
Pivoting front fenders						
Additional equipment						
Isolator switch						
Mechanical loader joystick						
Electronic loader joystick on armrest						

DIMENSIONS (Tyres=420/85R30 & 320/85R24 width 1.7 m)

			MF 5M.95 MF 5M.105 MF 5M.115	MF 5M.125 MF 5M.135 MF 5M.145
A	Overall length from front weight frame to rear linkage arms	mm	4,205	4,405
B	Wheelbase	mm	2,430	2,620
C	Height to top of roof (standard/Visio)	mm	2,685*	2,730**
D	Maximum ground clearance [†] (remove 80mm for pick-up hitch)	mm	515	520
E	Height to top of roof (standard/Visio) from rear axle	mm	1,949	
	Width (min / max)	mm	1,795–2,587	1,795–2,587
	Turning circle - external diameter, less brakes	m	4.63	5.01

*16.9 R 34 tyres ** 18.4 R 38 tyres [†]420/85R38 tyres

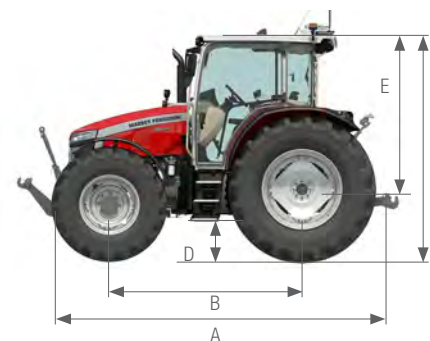

KEY
 Standard specification
 Optional
 - Not available

Overseas model shown. Specifications, features, and availability may vary by model and region.

		5M.95	5M.105	5M.115	5M.125	5M.135	5M.145
Platform/Cab		Platform/Cab				Cab	
Engine Performance							
Nominal hp (kW) power @ 2200 rpm	□ ISO hp (kW)	90 (68)	100 (75)	110 (82)	120 (90)	130 (97)	140 (105)
Max hp (kW) power @ 2000 rpm	□ ISO hp (kW)	95 (71)	105 (78)	115 (86)	125 (93)	135 (101)	145 (107)
Max torque @ 1500 rpm	Nm	405	440	460	520	545	560
Engine							
Type/Capacity/no. of Cylinders		AGCO POWER 4.4 Liters, 4 cylinders					
Technology		Electronic injection, Common rail, 4 valves per cylinder, DOC + SCR					
Transmission							
Type/ No. of gears		12X 12 or Semi Powershift 16x16†					
Gears/ Ranges		4x4					
Shuttle		Power Shuttle (Power Control Lever & Comfort Control) + Brake to Neutral (optional)					
Min Speed @ 1400 rpm	km/h	1.30					
Optional creeper gears		32×32					
Min Speed @ 1400 rpm* with creeper	km/h	0.10					
Power Take-off							
Operation and control		Independent/Electro hydraulic control					
Standard PTO speeds		540/540Eco/1000 for Dyna 4 and 540/540E for 12 x 12's					
Optional PTO speeds for 12x12		540/540Eco/1000					-
PTO speed @ engine rpm	540 & 1000	2000					
PTO speed @ engine rpm	540 Eco	1550					
PTO shaft							
Standard		6 splines					
Optional		21 splines					
Hydraulics							
Max oil flow - Stage 1	litres/min	34 l/min supplying steering brakes, diff lock, PTO, 4WD					
Standard max oil flow - Stage 2	litres/min	58 l/min supplying spool valve and linkage					
Standard max oil flow - Stage 2	litres/min	58 l/min supplying rear linkage + 42 l/min supplying spool valve The two pumps can be combined to supply 100 l/min to spool valves (eg : Loader)					
Combined flow control		Manual					
Max pressure	Bar	200					
Standard spool valves / Optional spool valves		2 / 3					
Rear linkage							
Maximum lift capacity	kg	4,300			5,200		
Lower links		Hook ends (cat 2)			Hook ends (cat 3)		
Brakes							
Type		Hydraulic / Oil cooled					
Rear tyres							
Standard for 12x12		460/85 R 34			460/85 R 38		
Optional for 12x12		540/65 R 38 540/65 R 34			540/65 R 38 540/65 R 34		-
Standard for Dyna 4		-	540/65 R 38				
Optional for Dyna 4		-	340/85 R 38 420/85 R 34		460/85 R 38 540/65 R 34		
Capacities							
Fuel tank capacity	litres	198					
Weight							
Min. weight / average weight / max. weight **	kg	4,225/4,500/5,450			4,475/4,750/5,700		

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.

KEY

- ISO TR14396
- * Manufacturer's testing
- ** Standard configuration with full fuel tanks, an operator - 75 kg and the smallest tyres

[†]MF 5M.105 - MF 5M.145



www.MasseyFerguson.com.au
www.MasseyFerguson.com.nz

www.facebook.com/masseyfergusonANZ
[Twitter.com/MF_EAME](https://twitter.com/MF_EAME)
[Instagram.com/MasseyFergusonGlobal](https://www.instagram.com/MasseyFergusonGlobal)
www.YouTube.com/MasseyFergusonGlobal



MASSEY FERGUSON® is a worldwide brand of AGCO.
© AGCO SAS. 2024

Part number: ANZ_MAS0248_MF5M_0525 Printed May 2025
Overseas model shown. Specifications, features, and availability may vary by model and region.



MASSEY FERGUSON

BORN TO **FARM**