

4E SERIES

ROPS & CAB

62 - 95^{HP}



Known for exceptional cab comfort, with car-like tech and features, the 4E Cabin Series offers three models ranging in output from 62 hp to 95 hp. Highly manoeuvrable and offered with STOLL loader options, standard features include engine speed programming, synchro shuttle with splitter, 4 wheel wet disc brakes and high capacity hydraulics.


Or choose the efficient 85 hp 4E ROPS, ideal for raking, slashing, feeding out and day-to-day farming tasks. With an ISO mounted platform, intuitive controls, clever ergonomics and remarkable visibility, the 4E ROPS carries many of the same features of a cabin tractor. All 4E series tractors are equipped with a forward / reverse shuttle synchronised transmission; a must when doing loader work.



4E CABIN



4E ROPS

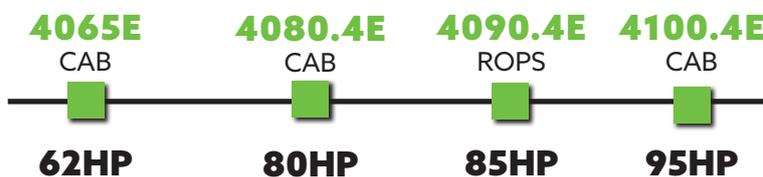

TECHNICAL DATA & FEATURES	4065E CAB	4080.4E CAB	4090.4E ROPS	4100.4E CAB
---------------------------	-----------	-------------	--------------	-------------



POWER + PERFORMANCE				
---------------------	--	--	--	--

Engine Type	Deutz-Fahr SDF 1000 Series			
Emissions	Tier III A			
Cylinders / Capacity	3/3000	4/4000		
Aspiration	Turbo	Turbo Intercooler		
Max Power - ECE R120 (kW/HP)	45.6/62	58.8/80	62.5/85	70/95
Max Torque (Nm)	240	325	348	373
Rated Engine Speed (rpm)	2200			2000
Fuel Capacity (l)	70			

DRIVE + HANDLING				
------------------	--	--	--	--

Gearbox Type and Gears	Synchronised Shuttle			
Number of Gears	30+15			
Forward/Reverse Shuttle	■			
Clutch Type	Double Dry HD 11"	Double Dry HD 12"		
Min Speed (km/h)	0.23			
Max Speed (km/h)	40			
4WD	■			
Diff Lock	Mechanically Operated Front + Rear			
Brakes (NO / Type)	4/ Independent Wet Disc			
Wheel Size - Rear	Adjustable 340/85R28	Adjustable 420/85R30		
Wheel Size - Front	Adjustable 9.5R20	Adjustable 320/70R24		
PTO Type	Mechanical Independent			
Speeds - Rear	540 / 750			
PTO engine speed (rpm)	1967 / 1560			

LIFT + FLOW				
-------------	--	--	--	--

Type	Open Centre			
Flow Rate (l/min)	Steering 17 / Hydraulic 42			
Remote Valves (sets)	2	3		
Remote Valve Type	Spring	2 Detent + Spring / 1 Float		
3 Point Hitch Type	Mechanical with Draft			
Category	2			
Hitch End Type	Ball			
Max Lift Capacity - Rear (kg)	2500	3500		

COMFORT + CONVENIENCE				
-----------------------	--	--	--	--

Air-Conditioned Cabin	■	-	-	■
Digital Climate Control	■	-	-	■
2 Post ROPS	-	-	■	-
Sun Canopy	-	-	■	-
Driver Seat w/ Mechanical Suspension	■			
Adjustable Steering Wheel	■			
Display	Analogue			
Side Control Levers	■			
Engine Speed Programming	-	■		
EASYLIFT Three Point Linkage	■			
Flat Platform Mounted on Silent-Block	■			
Upswept Side Mounted Exhaust	■			
Worklights (No + Type)	2 Bonnet / 4 Cabin		2 Bonnet / 1 Rear	2 Bonnet / 4 Cabin

WEIGHTS + DIMENSIONS				
----------------------	--	--	--	--

Wheelbase (mm)	1976	2106		
Length (mm)	3730	3990		
Mid Overall Width (mm)	1800	1830		
Height (mm)	2607	2666	2563	2666
Weight (kg)	2950	3250	3100	3250

■ Standard

