

Make it easy
ISEKI



SF OUTFRONT MOWERS

31 & 37hp

ISEKI

JAPANESE BUILT PROFESSIONAL MOWERS

For over 30 years, grounds care specialists, contractors and municipal councils have relied on the quality design and manufacturing of Iseki outfront mowers.

Designed for demanding, professional applications - the Iseki SF series combines rugged reliability and efficient, powerful engines with an excellent cut and finish to your lawn areas.

In addition to the high performance of your Iseki mower you are also backed by one of the world's largest agricultural companies for first class service and parts support.





POWERFUL ENGINES

Iseki engines give you more power when you need it with engines that develop peak torque at low engine speeds, making easy work of heavy conditions.

Get the job done faster with a top speed of 22 km per hour.



EFFICIENT COOLING

- Efficient water cooled system
- Large cooling vents ensures maximum cooling efficiency and maximum performance in tough conditions
- Large radiator
- Increased muffler shrouding



DIESEL & TURBO DIESEL

SF310 - 31hp/2700rpm

SF370 - 37hp/2700rpm

- 31 or 37 hp low revving power
- Efficient turbocharger on SF370 models
- Confident in all conditions - power through wet, long grass
- Quiet

SMOOTH FINISHING DECKS



Iseki decks are strong and robust and available in side or rear discharge options.

Their unique parallel floating design ensures an even cut over rough, rolling terrain while a very high blade tip speed gives your lawn an excellent cut and finish.



SIDE DISCHARGE DECK

- Three blade side discharge deck
- Option of 60" or 72" cutting decks
- Adjustable cutting height from 25mm to 120mm
- Deep deck design handles large volume of grass
- 6 anti scalping rollers



REAR DISCHARGE

- Equal spreading of grass
- Easy maintenance
- Mulching kit available
- 72" cut



DECK LIFT & SUSPENSION

- Unique four point parallel deck suspension absorbs shock and follows contours for a superior finish
- High lift capacity for maximum clearance
- Handy flip-up deck for easy access to blades

OPERATOR COMFORT



OPERATING LEVERS

- Conveniently located for easy access
- Hydraulic deck lift
- Cruise control for operators that need to cover large areas and reduces fatigue
- Two speed hydrostatic transmission selection



DUAL PEDAL

- Efficient and easy directional control
- Dual pedals reduce operator fatigue during repetitive movements



AUTO DETECT 4WD

- Automatically senses wheel slippage and engages 4WD
- Improved performance in heavy and sloping conditions
- Improved operator safety
- Selectable permanent 4WD






SEAT OPTIONS

- Comfortable mechanical suspension seat protects operator from repetitive shocks
- Option of Air Suspension seat for maximum comfort



INSTRUMENT PANEL

- Adjustable steering column improves operator comfort and control
- Central gauges and controls on steering column, easy to read at a glance in tough conditions
- Independent PTO control for fast, easy engagement
- Hour meter, tachometer, fuel and temperature gauges

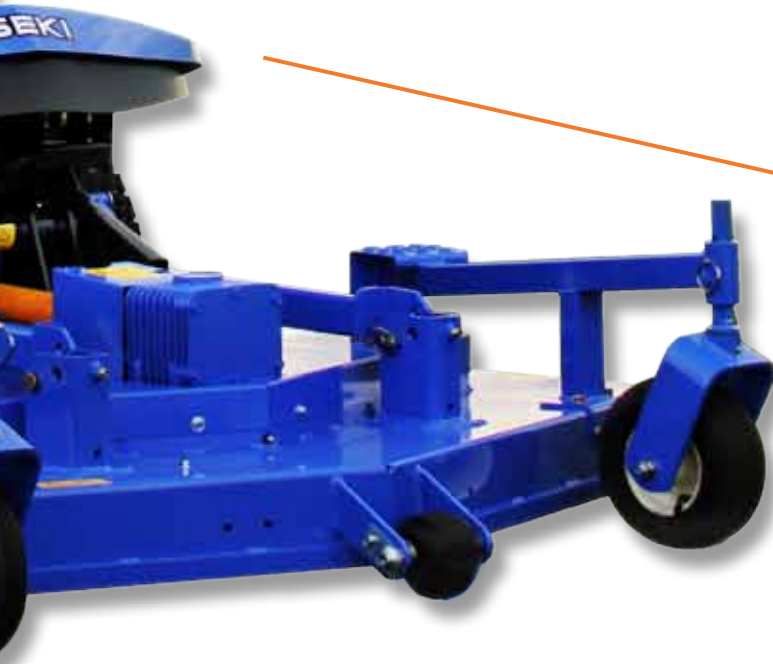

OPERATOR'S PLATFORM

- Clear unobstructed view of deck cutting area
- Large step through platform
- Left and right steering brakes

BUILT TOUGH



The reliable high performance and quality of Iseki's outfront mowers means you can tackle rough, uneven terrain, while the robust build handles tough conditions, working hard with you all day.



PTO

- Straight design
- Less wear and stress means greater longevity



DRIVELINE

- Built in final drive via crown wheels
- Differential lock
- Permanent or auto-detect 4WD



TIGHT TURNING RADIUS

- Sharp turning circle for increased manoeuvrability with easy access to tight spaces

SERVICE AND MAINTENANCE



The clever design of Iseki's outfront mowers means you can spend more time getting the job done and less time on maintenance.

The renowned Japanese quality of Iseki ensures many hours of uninterrupted operation.



EASY FLIP DECK

- Both the side and rear discharge deck can be easily flipped to allow ease of access to mower blades



EASY OPEN BONNET

- Quickly access engine and radiator with an easy release latch
- Easy maintenance of fluid levels and air cleaner



EASY ACCESS TO GEARBOX

- Gear box and linkages are easily accessed under the flat operator's platform

RANGE SPECIFICATIONS



DECK	60" Side	72" Side	72" Rear
Model	SSM60	SSM72	SRM72
Type	Rotary mower – Side discharge	Rotary mower – Side discharge	Rotary mower – Rear discharge
Cutting width	1524mm	1830mm	1830mm
No. of blades	3	3	3
Drive	Shaft	Shaft	Shaft & Belt
Rotar drive	Double belt	Double belt	Double belt
Control	Hydraulic lift	Hydraulic lift	Hydraulic lift
Cutting heights	25 – 116mm	30 – 120mm	30 – 120mm
Anti-scalp rollers	3	6	7
DIMENSIONS			
Overall length	1073mm	1165mm	1181mm
Overall width	1900mm	2280mm	1878mm
Overall height	524mm	521mm	517mm
Weight	200kg	230kg	236kg

MODEL	SF310	SF370
ENGINE SPECIFICATIONS		
Engine	Iseki E3CD Diesel	Iseki E3CD-T Turbo diesel
Number cylinders/cc	3/1498	3/1498
hp	31	37
PTO		
Type	Independent electro-hydraulic	Independent electro-hydraulic
Speed - High	2500 RPM	2500 RPM
Operation	Dial switch	Dial switch
TRANSMISSION		
Type	Hydrostatic	Hydrostatic
Speed range	F: 0 to 22.8	F: 0 to 22.8
Speeds For/Rev	2/2	2/2
BRAKES AND STEERING		
Brake type	Wet multi disc	Wet multi disc
Steering type	Hydrostatic	Hydrostatic
CAPACITIES		
Fuel	48 ltr	48 ltr
Transmission	11 ltr	11 ltr
TYRE EQUIPMENT		
Standard front	23 x 10.5 – 12	23 x 10.5 – 12
Standard rear	20 x 8.0 – 10	20 x 8.0 – 10
DIMENSIONS/WEIGHTS		
Overall width	1191mm	1191mm
Overall height	1486mm	1486mm
Overall length	2424mm	2424mm
Dry shipping weight	853kg	853kg

www.iseki.com.au



Specifications, standard and optional equipment on products change from time to time. Please consult your local dealer to ensure your expectations are matched by the product which will be available locally at the time you take delivery.

