



F2890/F3690

Two revamped models with enhanced cutting and discharge performance make the F-Series the new standard in professional front-mount mowers.





greater productivity and cleaner nals and the environment.




HIGH-PERFORMANCE

Get more jobs done in less time with Kubota's powerful and clean diesel engines and high lifting capacity.

Kubota diesel engines

Powerful Kubota diesel engines mean faster, more efficient job performance. These F-Series diesel engines have power to spare. Their high torque rise ensures faster, smoother recovery under sudden loading, letting you power through tall or wet grass without skipping a beat. They're also environmentally and economically friendly, thanks to their enhanced combustion efficiency, low vibration and noise levels, and reduced fuel costs.

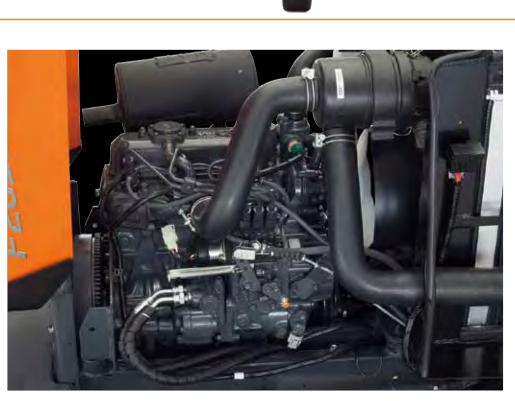

F2890 28HP/3000RPM

F3690 **36HP/3000RPM**



High lifting capacity

A high lifting capacity gives the F-Series the versatility to handle an array of implements, including a grass catcher.







Large capacity fuel tank

A large, 61 litres fuel tank not only keeps you working longer between fuel stops, it also reduces the number of fueling stops needed to complete long jobs. That means more time working and less time fueling up. The refueling pipe is now conveniently located right behind the ROPS.

4WD and Auto-Assist 4WD

Auto-Assist 4WD works in forward and reverse. automatically controlling the drive loads on the wheels during turns. Auto-Assist 4WD lets you turn with greater efficiency and ease with less wear and tear on the turf. Fulltime 4WD can also be engaged.

Hydrostatic power steering

Hydrostatic power steering reduces operator fatigue and makes it easier to mow around trees and other obstacles.





Single HST pedal

A powerful hydrostatic transmission provides quick response, excellent working speed, and more muscle for tough mowing jobs. The single pedal design lets you easily change the direction as well as control the speed (4WD: 20 km/h max. forward speed, 11 km/h in reverse), keeping your hands free for steering and implement control for increased productivity.



Large tyres with wide

Four large-sized tyres provide a wide tread for greater stability and manoeuvrability on slopes, better flotation and less ground compaction.



Tilt steering wheel

The tilt steering wheel can be quickly adjusted to several positions for optimum operator comfort and further driving ease.



High/Low lever

The handy Hi/Low lever is standard equipped on all models so you can adjust the mower speed to better match the terrain or situation.

PROFESSIONAL MOWER DECK

A durable, hard-working deck that's ready for a wide range of

mowing jobs.

Pro-Commercial mower deck

The Pro-Commercial mower deck comes with an inner baffle to prevent cut grass from discharging to the front. A larger discharge chute improves discharge performance.

CE SERVICE STORY OF THE SECOND								
	Side dis	charge	Rear discharge					
	60"	72"	60"	72"				
F3690	0	0	0	0				
F2890	0	0	0	0				





PTO shaft drive

Shaft drive means no belts or pulleys - just smooth and direct power transfer from the engine to the deck and other PTOdriven attachments. Shaft drive also requires less maintenance and provides greater dependability.



Multi-V-belt/Steel pulleys

In addition to providing greater wear resistance, the heavy-duty cast-iron pulleys and a multi-V-belt drive system effectively distribute and reduce tension while transmitting power to the mower blades. The multi-V-belt won't twist or slip, thus reducing the chance of damage to the mower. You get more performance and power and fewer problems.



Swivel anti-scalp wheels

The mower deck is equipped up front with two large wheels that swivel independently through 360 degrees. The wheels ensure that the deck remains above the turf. preventing unsightly turf damage.



Fabricated deck with sturdy steel construction

Stronger and more durable than conventional pressed steel decks. the F-Series' fabricated steel decks are designed to provide years of reliable cutting performance with minimal maintenance.

6.0" deep mower deck

Tall grass is no problem for this side-discharge professional mower deck. Its 6.0"-deep deck design lets tall grass stand up so that it can be cut more efficiently. This results in a faster cut and a cleaner appearance.



Rear discharge mower

When side discharge won't do, mount an optional rear discharge mower deck. Two sizes—60" and 72"—are available. Both decks tilt up 90 degrees for easier cleaning and blade sharpening. They also feature sturdy steel construction for greater durability and front lift arms that attach directly over the center of gravity for better control. Mulching kits are also available.

Mulching kit (option)

The professional mulching kit converts the standard deck into a high-precision mulching deck that produces an even finer mulch and sends it straight back into the turf.



SIMPLE MAINTENANCE

Designed from the ground up for fast, easy maintenance.













Dual-element air cleaner

The dual-element air cleaner helps keep the engine running smoothly and efficiently. Only the outer filter needs to be replaced—the inner filter can be cleaned with pressured air—helping to reduce maintenance costs.

Integrated radiator screen

The new, easy to clean radiator screen is integrated into the engine cover to help keep the engine running cool and efficiently. A water temperature gauge and overheating alarm are also provided to help prevent overheating.

New digital panel

The new easier to read LCD and LED digital panel vital information about the F-Series mower at a glance, including engine speed, remaining fuel, water temperature and hour meter.

Tool box

Conveniently located under the seat, the tool box provides fast-access storage for your tools. It's also an ideal place to store your operator manual for quick and easy reference while on the job.

DRIVING COMFORT

The all-important key to safe, efficient, productive mower operation.

Comfort

Long hours on the job can take a toll on operator efficiency. That's why all Kubota F-Series mowers are equipped with a large operator's platform and a variety of features to keep you comfortable and productive under all working conditions. You'll notice the difference after a long day behind the wheel.









Deluxe seat

The F-Series' high level of comfort starts with a deluxe high-back seat with four separate adjustments—weight control, lumbar support, back angle, and arm rests—to provide every operator with a custom fit and optimum comfort. (Optional air seat available)

Operator levers

For easier operation and greater convenience, the High/Low speed lever and deck-lifting lever are positioned beside the operator's seat. The lever guides have also been designed for quick, at-aglance identification.

SPECIFICATIONS

Model			F2890	F3690		
			4WD			
Engine						
Model			Kubota D1105	Kubota V1505		
Туре			Liquid-cooled diesel (3 cyl)	Liquid-cooled diesel (4 cyl)		
Max. horsepower		HP (kW)	28 (20.9)	36 (26.9)		
Total displacement		cm ³	1,123	1,498		
Air cleaner	Туре		Dual element			
	Air restriction indicator		N/A	Standard		
Alternator			12 V, 4	40A		
Fuel tank capacity		ℓ	61.0)		
Transmission Type			HST (F2	2/R2)		
Max. travel speed	Forward / Reverse	km/h (mph)	20 (12.5)/11 (6.8)			
4WD mode select			Auto-assist 4WD with dual acting overrunning clutch/locked 4WD			
Differential lock			Stand	<u> </u>		
Гуге						
Front			24 x 12-12			
Rear			18 × 9.5-8			
Brake			Wet di	scs		
Steering						
Type			Hydrostatic power			
Tilt steering			Standard			
Dimension						
Tread (F/R)		mm	1,047/			
Wheel base		mm	1,300			
Overall length		mm	2,450			
Overall width		mm	1,370			
Overall height		mm	1,985			
Weight		kg	748 765			
Ground clearance		mm	185	j		
Mower mounting Type			Independent live	Shaft drive		
PTO revolution			2.54			
Clutch			Wet multi disc			
Lift system			Hydraulic 2-			
Tilt angle		Degrees	nyuraulic 2-1			
Weight transfer		Deglees	Stand			
Other			Siana	aiu		
Turn assist brake			Option	nal*		
Cruise control			Option	nal		
Fuel gauge			LCD Dis	splay		
Tachometer			LCD Dis	splay		
Toolbox			Standard/not availa	able with air seat		
Seat			Reclining suspension seat/or	otional air suspension seat		
Cup holder			Stand			
ROPS			Standard (ISO 212	299 and OSHA)		

^{*}Turn assist brake is standard in the specific country.

Mower Specifications

-						
Model		RCK60P-F39	RCK72P-F39	RCK60R-F36	RCK72R-F36	
Discharge		Side discharge Rear di		scharge		
Cutting width	mm	1,520	1,826	1,520	1,826	
Cutting height	mm	25 - 127				
Cutting height adjustment	mm	Each 6.4				
Depth	mm	152 140			40	
Deck pan		Welded				
Thickness	mm	4.2		4	4.5	
Number of blades		3				
Tilt assist		N/A	Standard	N/A	Standard	
Mulch kit		Optional				

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty and safety information.

For your safety, KUBOTA strongly recommends the use of a Roll Over Protective Structure (ROPS) and seat belt in almost all applications.



Kubota Australia Pty Ltd

25-29 Permas Way, Truganina VIC, 3029 Australia Freecall: 1800-334-653 Email: sales@kubota.com.au

Web Site: http://www.kubota.com.au

©2019 Kubota Corporation

Kubota New Zealand Limited

Freecall: 0800-582-682 Email: sales@kubota.com.au

Web Site: http://www.kubota.co.nz

