






## KUBOTA LAWN & GARDEN TRACTORS GR2120

Cut down your mowing time while manicuring your lawn, with Kubota's revolutionary 'Glide Steer' technology.

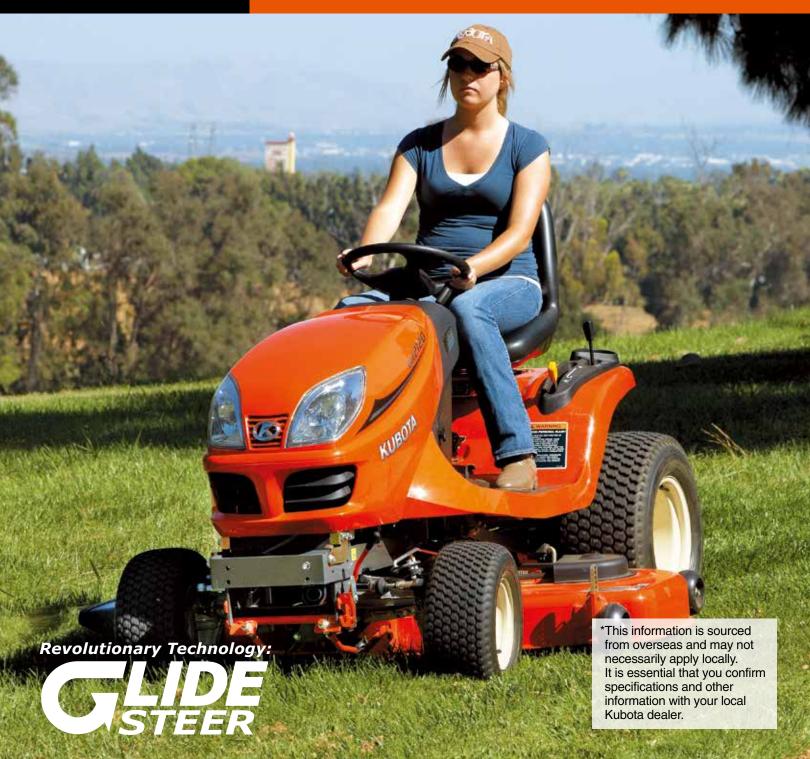

# GR2120 with Glide Steer technology excels where 4wd traction and efficient mowing are needed.


### Revolutionary Technology:

GLIDE STEER


Only revolutionary technology by Kubota could enable the GR2120 to turn so sharply, yet minimize potential turf damage to levels below standard 2wd lawn tractors. Offering precise control and exceptional traction with 'Glide Steer', GR2120 tractors not only cut in confined areas, they cut down overall mowing time as well. Add it all up, and you have the most manoeuvrable and powerful lawn tractor Kubota has ever built.

### Glide Steer

Here's how our technology works. When starting a turn on the GR2120, the inside rear wheel begins to track freely. This enables a tight turn while preventing damage to the turf.



rear wheel traction



During Glide Steer operation

Steering angle

\*Graphical representation only.





**KUBOTA LAWN & GARDEN TRACTOR** 

# **GR2120**

### **Outstanding Traction**

When driving in a straight direction, the GR2120 provides outstanding traction with all-wheel drive.

### **Sharp Turning**To provide the sharpest

To provide the sharpest turn possible, both front wheels turn an incredible 70 degrees.

### Outstanding Traction

Once the front wheels are straight again, the GR2120 resumes all-wheel drive.

### Performance

You demand the best. The GR2120 deliver.

Unmatched in its class, Kubota incorporates advanced farm tractor technologies in every GR2120 lawn tractor.

#### **Powerful Engine**

Tapping Kubota's legendary heritage of quality engine design, the GR2120 is powered by a Kubota 21-horsepower, 3-cylinder diesel engine. This engines generates a high torque rise that easily handles hours of heavy-duty mowing.



### **Hydrostatic Power Steering**

Soft-touch power steering enhances maneuverability, reduces fatigue, and makes operating the GR2120 nearly effortless.









### Turf

#### Our 48-inch mower decks ensure professional results.

The GR2120 decks are constructed of durable 10-gauge steel and designed with a 5-inch deep shell to assure professional and lasting results. And with an easy to reach cutting height adjustment dial and hydraulic mower deck lift, your professional results just became easier to

your professional results just became easier to manage. For even finer clippings, an optional mulching kit is also available.

### New HST Transmission

Kubota's reputable HST transmission is easily controlled by a single foot pedal, and produces a smooth and comfortable ride.



Easy reach cutting height adjustment dial



Hydraulic mower lift lever

### Mulching Kit (Optional)

A one-piece unit that's easy to install, our mulch system makes clippings disappear into your grass, creating a healthier lawn.



### "Catch All" Grass Catcher (Optional)

Incredibly sturdy yet lightweight, the large-capacity, 350 litre grass catcher lets you mow longer with fewer stops for emptying.









Durability

Years of resilient service.

#### **Enhanced Durability**

Starting with a 8mm U-frame platform, every component from the ground up has been designed to provide significant durability for years of service. Hydraulic PTO and shaft drives are only a few farm tractor features that distinguish the GR from its competition.










### Shaft-drive PTO/ Hydraulic PTO Clutch

Conventional mowers utilize electric, belt driven PTOs, but our mowers don't. Our shaft-drive mower deck and hydraulic PTO clutch deliver reliability with far less maintenance. No more belts and pulleys to maintain.

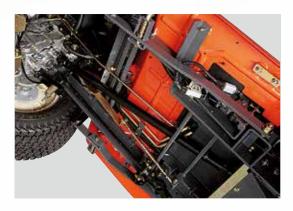

#### **Shaft-drive Transmission**

Unlike a belt-drive transmission utilized in conventional mowers, our low-maintenance shaft-drive transmission will provide years and years of reliable service.

### **Implements**



Grass Catcher (GCK54-GR)

### Comfort

#### Maximum comfort for maximum output.

### **Suspension Seat/Full-flat Operator Platform**

Oversized and generously padded, the GR2120's suspension seat can be adjusted to provide a high level of comfort to a wide range of operators. The full-flat open platform minimizes operator fatigue by offering plenty of legroom. For additional comfort, optional arm rests are available.





#### **Specifications**

Engine         Model         D782           Type         3 cylinders, diesel, water-cooled           Total displacement         cc         778           Gross horsepower         kW         15.6           Engine layout         Horizontal           Fuel tank capacity         €         18           Dimension           Overall length         mm         1960           Overall width (with/mower)         mm         1290           Wheelbase         mm         1280           Tread           Front/Rear         mm         825 / 800           Weight (w/mower)         kg         440           Weight (w/mower)         kg         440           Tyre size         Front/Rear         16 × 7.5 - 8 / 23 × 10.50 - 12           Transmission         Hydrostatic transmission           Transmission drive         Shaft drive           Speed control         Single foot pedal           Traveling speed         Single foot pedal           Froward/Feverse         km/h         0 - 10.0 / 0 - 5.0           Cruise control         Sit           Brake         Internal expancting brake           PTO clutch         Hydraulic wet multi discs	Model		GR2120-2	
Model         D782           Type         3 cylinders, diesel, water-cooled           Total displacement         cc         778           Gross horsepower         kW         15.6           Engine layout         Horizontal           Fuel tank capacity         /         18           Dimension         Overall length         mm         1960           Overall width (with/mower)         mm         1290           Overall height         mm         1290           Wheelbase         mm         1280           Tread         Front/Rear         825 / 800           Weight (w/mower)         kg         440           Tyre size         Front/Rear         16 × 7.5 - 8 / 23 × 10.50 - 12           Transmission         Hydrostatic transmission           Transmission drive         Shaft drive           Speed control         Single foot pedal           Traveling speed         Std.           Forward/Reverse         km/h         0-10.0 / 0-5.0           Cruise control         Std.           Brake         Internal expanding brake           PTO clutch         Hydraulic wet multi discs           Mower deck drive         Shaft drive           Steer ing syste	Engine			
Total displacement			D782	
Gross horsepower kW 15.6 Engine layout Horizontal Fuel tank capacity 188  Dimension Overall width (with/mower) mm 1960 Overall width (with/mower) mm 1700 Overall height mm 1290 Wheelbase mm 1280 Tread Front/Rear mm 825 / 800 Weight (w/mower) kg 440 Tyre size Front/Rear 16x 7.5 = 8/23 × 10.50 – 12 Transmission Transmission Hydrostatic transmission Transmission Shaft drive Speed control Single foot pedal Traveling speed Forward/Reverse km/h 0 – 10.0 / 0 – 5.0 Cruise control Std. Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Steering system Glide Steer, hydraulic power steering Operator's deck Flat Seat adjustment Seat suspension Mechanical suspension with weight adjustment Feul gauge Hour meter Std. Easy checker Mower OPC. Travel OPC. Std. Blade shut off brake FTO Clutch Grass actacher (optional) Capacity / 350	Туре		3 cylinders, diesel, water-cooled	
Engine layout Fuel tank capacity	Total displacement		778	
Fuel tank capacity	Gross horsepower	kW	15.6	
Dimension Overall length mm 1960 Overall with (with/mower) mm 1700 Overall height mm 1290 Wheelbase mm 1280 Tread Front/Rear mm 825 / 800 Weight (w/mower) kg 440 Tyre size Front/Rear	Engine layout		Horizontal	
Overall length Overall width (with/mower)         mm         1960           Overall width (with/mower)         mm         1700           Overall height         mm         1290           Wheelbase         mm         1280           Tread Front/Rear         mm         825 / 800           Weight (w/mower)         kg         440           Weight (w/mower)         kg         440           Tyre size Front/Rear         16 × 7.5 - 8 / 23 × 10.50 - 12           Transmission         1 Hydrostatic transmission           Transmission drive         Shaft drive           Speed control         Single foot pedal           Traveling speed         Forward/Reverse           Forward/Reverse         km/h         0 - 10.0 / 0 - 5.0           Cruise control         Std.           Brake         Intermal expanding brake           PTO clutch         Shaft drive           Mower deck drive         Shaft drive           Steering system         Glide Steer, hydraulic power steering           Operator's deck         Flat           Seat adjustment         Slide           Seat adjustment         Std.           Fuel gauge         Std.           Hower OPC.         Std.	Fuel tank capacity	$\ell$	18	
Overall width (with/mower) mm 1700 Overall height mm 1290 Wheelbase mm 1280  Tread Front/Rear mm 825 / 800 Weight (w/mower) kg 440 Tyre size Front/Rear 16×7.5–8/23×10.50–12 Transmission Hydrostatic transmission Transmission drive Shaft drive Speed control Single foot pedal Traveling speed Forward/Reverse km/h 0–10.0 / 0–5.0  Cruise control Std. Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Shaft drive Steering system Glide Steer, hydraulic power steering Operator's deck Flat Seat adjustment Stid. Seat suspension Whechanical suspension with weight adjustment Fuel gauge Std. Hour meter Std. Easy checker Std. Mower OPC. Travel OPC. Std. Blade shut off brake FTO Clutch Grass catcher (optional) Capacity 4, 350	Dimension			
Overall height Wheelbase     mm     1290       Wheelbase     mm     1280       Tread Front/Rear     mm     825 / 800       Weight (w/mower)     kg     440       Tyre size Front/Rear     16 × 7.5 − 8 / 23 × 10.50 − 12       Front/Rear     16 × 7.5 − 8 / 23 × 10.50 − 12       Transmission     Hydrostatic transmission       Transmission drive     Shaft drive       Speed control     Single foot pedal       Traveling speed     Forward/Reverse     km/h     0 − 10.0 / 0 − 5.0       Cruise control     Std.       Brake     Internal expanding brake       PTO clutch     Hydraulic wet multi discs       Mower deck drive     Shaft drive       Stearing system     Glide Steer, hydraulic power steering       Operator's deck     Flat       Seat adjustment     Slide       Seat adjustment     Slide       Seat suspension     Mechanical suspension with weight adjustment       Fuel gauge     Std.       Hour meter     Std.       Easy checker     Std.       Mower OPC.     Std.       Easy checker     Std.       Blade shut off brake     PTO Clutch       Grass catcher (optional)     Capacity     4       350			***	
Wheelbase         mm         1280           Tread Front/Rear         mm         825 / 800           Weight (w/mower)         kg         440           Tyre size Front/Rear         16×7.5−8/23×10.50−12           Transmission         Hydrostatic transmission           Transmission drive         Shaft drive           Speed control         Single foot pedal           Travelling speed Forward/Reverse         km/h         0−10.0 / 0−5.0           Cruise control         Std.           Brake         Internal expanding brake           PTO clutch         Hydraulic wet multi discs           Mower deck drive         Shaft drive           Steering system         Glide Steer, hydraulic power steering           Operator's deck         Flat           Seat adjustment         Slide           Seat suspension         Mechanical suspension with weight adjustment           Fuel gauge         Std.           Hour meter         Std.           Easy checker         Std.           Mower OPC.         Std.           Travel OPC.         Std.           Blade shut off brake         PTO Clutch           Grass catcher (optional)         4         350				
Tread Front/Rear mm 825 / 800 Weight (w/mower) kg 440  Weight (w/mower) kg 440  Tyre size Front/Rear 16×7.5-8/23×10.50-12  Transmission Transmission drive Shaft drive Speed control Single foot pedal Traveling speed Forward/Reverse km/h 0-10.0 / 0-5.0  Cruise control Std.  Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Shaft drive Steering system Glide Steer, hydraulic power steering Operator's deck Flat Seat adjustment Slide Seat suspension Mechanical suspension with weight adjustment Fuel gauge Std. Hour meter Std. Easy checker Std. Mower OPC. Travel OPC. Std. Blade shut off brake PTO Clutch Grass catcher (optional) Capacity & 350				
## Front/Rear mm 825 / 800    Weight (w/mower) kg 440    Tyre size   Front/Rear   16×7.5−8/23×10.50−12   Front/Rear   16×7.5−8/23×10.50−1	Wheelbase	mm	1280	
Weight (w/mower)         kg         440           Tyre size         16×7.5−8/23×10.50−12           Front/Rear         16×7.5−8/23×10.50−12           Transmission         Hydrostatic transmission           Transmission drive         Shaft drive           Speed control         Single foot pedal           Traveling speed         Single foot pedal           Forward/Reverse         km/h         0−10.0 / 0−5.0           Cruise control         Std.           Brake         Internal expanding brake           PTO clutch         Hydraulic wet multi discs           Mower deck drive         Shaft drive           Steering system         Glide Steer, hydraulic power steering           Operator's deck         Flat           Seat adjustment         Slide           Seat suspension         Mechanical suspension with weight adjustment           Fuel gauge         Std.           Hour meter         Std.           Easy checker         Std.           Mower OPC.         Std.           Travel OPC.         Std.           Blade shut off brake         PTO Clutch           Grass catcher (optional)         Capacity         350	Tread		925 / 900	
Tyre size Front/Rear 16 x 7.5 − 8 / 23 x 10.50 − 12  Transmission Hydrostatic transmission Transmission Shaft drive Speed control Single foot pedal  Travelling speed Forward/Reverse km/h 0−10.0 / 0−5.0  Cruise control Std.  Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Shaft drive Steering system Glide Steer, hydraulic power steering Operator's deck Flat Seat adjustment Slide Seat suspension Mechanical suspension with weight adjustment Fuel gauge Std. Hour meter Std. Easy checker Std. Mower OPC. Travel OPC. Std. Grass catcher (optional) Capacity ℓ 350				
Front/Rear         16×7.5−8/23×10.50−12           Transmission         Hydrostatic transmission           Transmission drive         Shaft drive           Speed control         Single foot pedal           Traveling speed		kg	440	
Transmission drive  Speed control  Single foot pedal  Traveling speed Forward/Reverse  Forward/Reverse  Forward/Reverse  Forward/Reverse  Km/h  O=10.0 / 0=5.0  Cruise control  Std.  Brake  Internal expanding brake  PTO clutch  Hydraulic wet multi discs  Shaft drive  Shaft drive  Steering system  Glide Steer, hydraulic power steering  Operator's deck  Flat  Seat adjustment  Steed  Seat suspension  Mechanical suspension with weight adjustment  Fuel gauge  Std.  Hour meter  Easy checker  Std.  Mower OPC.  Travel OPC.  Blade shut off brake  PTO Clutch  Grass catcher (optional) Capacity  ### Capacity  Single foot pedal  **Entity**  **Continual of the pedal  **Entity**  **Ent			16×7.5-8/23×10.50-12	
Speed control  Traveling speed Forward/Reverse km/h 0−10.0 / 0−5.0  Cruise control  Std.  Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Steering system Operator's deck Seat adjustment Seat suspension Fuel gauge Hour meter Easy checker Mower OPC. Travel OPC. Blade shut off brake Grass catcher (optional) Capacity  km/h 0−10.0 / 0−5.0  Std.  0−10.0 / 0−5.0  Std.  Blade shut off brake  Flat Std.  Mondanical suspension with weight adjustment Std.  Bravel OPC. Std.  Std.  PTO Clutch  Std.  PTO Clutch  Grass catcher (optional) Capacity  ℓ  Single foot pedal  Non 10-10.0 / 0−5.0  Std.  Std.  Std.  Std.  PTO Clutch  Std.	Transmission		Hydrostatic transmission	
Traveling speed Forward/Reverse km/h Cruise control Std.  Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Steering system Operator's deck Seat adjustment Seat suspension Fuel gauge Hour meter Fuel gauge Hour meter Easy checker Mower OPC. Travel OPC. Blade shut off brake Grass catcher (optional) Capacity  km/h  O−10.0 / 0−5.0  Std.  O−10.0 / 0−5.0  Std.  Hotmand expanding brake  Internal expanding brake  Hydraulic wet multi discs  Std.  Hydraulic wet multi discs  Shaft drive  Shaft drive  Std. Flat Slide Seat suspension Mechanical suspension with weight adjustment  Std.  Std.  Std.  Std.  Fravel OPC. Std. Std.  Fro Clutch Grass catcher (optional) Capacity  ℓ  Std. Std. Std. Std. Std. Std. Std. Std	Transmission drive		Shaft drive	
Traveling speed Forward/Reverse km/h Cruise control Std.  Brake Internal expanding brake PTO clutch Hydraulic wet multi discs Mower deck drive Steering system Operator's deck Seat adjustment Seat suspension Fuel gauge Hour meter Fuel gauge Hour meter Easy checker Mower OPC. Travel OPC. Blade shut off brake Grass catcher (optional) Capacity  km/h  O−10.0 / 0−5.0  Std.  O−10.0 / 0−5.0  Std.  Hotmand expanding brake  Internal expanding brake  Hydraulic wet multi discs  Std.  Hydraulic wet multi discs  Shaft drive  Shaft drive  Std. Flat Slide Seat suspension Mechanical suspension with weight adjustment  Std.  Std.  Std.  Std.  Fravel OPC. Std. Std.  Fro Clutch Grass catcher (optional) Capacity  ℓ  Std. Std. Std. Std. Std. Std. Std. Std	Speed control		Single foot pedal	
Cruise control  Brake  PTO clutch  Mower deck drive  Steering system  Operator's deck  Seat adjustment  Seat suspension  Fuel gauge  Hour meter  Easy checker  Mower OPC.  Travel OPC.  Blade shut off brake  Grass catcher (optional)  Capacity   I Hydraulic wet multi discs  Hydraulic wet multi discs  Shaft drive  Shaf	Traveling speed Forward/Reverse	km/h		
PTO clutch  Mower deck drive  Steering system  Operator's deck  Seat adjustment  Seat suspension  Fuel gauge  Hour meter  Easy checker  Mower OPC.  Travel OPC.  Blade shut off brake  Grass catcher (optional)  Capacity  Agracia Glide Steer, hydraulic power steering  Glide Steer, hydraulic power steering  Slide  Seat suspension  Mechanical suspension with weight adjustment  Stid.  Mechanical suspension with weight adjustment  Stid.  Stid.  Fuel Grass catcher (optional)  Capacity  Agracity  Ag	Cruise control			
PTO clutch  Mower deck drive  Steering system  Operator's deck  Seat adjustment  Seat suspension  Fuel gauge  Hour meter  Easy checker  Mower OPC.  Travel OPC.  Blade shut off brake  Grass catcher (optional)  Capacity  Agracia Glide Steer, hydraulic power steering  Glide Steer, hydraulic power steering  Slide  Seat suspension  Mechanical suspension with weight adjustment  Stid.  Mechanical suspension with weight adjustment  Stid.  Stid.  Fuel Grass catcher (optional)  Capacity  Agracity  Ag	Brake			
Mower deck driveShaft driveSteering systemGlide Steer, hydraulic power steeringOperator's deckFlatSeat adjustmentSlideSeat suspensionMechanical suspension with weight adjustmentFuel gaugeStd.Hour meterStd.Easy checkerStd.Mower OPC.Std.Travel OPC.Std.Blade shut off brakePTO ClutchGrass catcher (optional) Capacity350	PTO clutch			
Steering system Operator's deck Flat Seat adjustment Slide Seat suspension Mechanical suspension with weight adjustment Fuel gauge Std. Hour meter Std. Easy checker Std. Mower OPC. Std. Travel OPC. Std. Blade shut off brake Grass catcher (optional) Capacity ℓ Slide Seat Suspension with weight adjustment Std. Std. Std. Flat Slide Std. Std. Flat Slide Std. Std. Std. Flat Slide Std. Std. Flat Slide Std. Std. Std. Flat Slide Std. Std. Std. Std. Std. Std. Std. Std.	Mower deck drive		·	
Operator's deck Seat adjustment Slide Seat suspension Mechanical suspension with weight adjustment Fuel gauge Std. Hour meter Std. Easy checker Std. Mower OPC. Std. Travel OPC. Std. Blade shut off brake PTO Clutch Grass catcher (optional) Capacity ℓ Slide Std. Std. Std. Std. Std. Std. Std. Std.				
Seat adjustment Seat suspension Mechanical suspension with weight adjustment  Fuel gauge Std.  Hour meter Std.  Easy checker Std.  Mower OPC. Std.  Travel OPC. Std.  Blade shut off brake PTO Clutch  Grass catcher (optional) Capacity ℓ Slide  Mechanical suspension with weight adjustment  Std.  Std.  Std.  FUEL Std.				
Seat suspension     Mechanical suspension with weight adjustment       Fuel gauge     Std.       Hour meter     Std.       Easy checker     Std.       Mower OPC.     Std.       Travel OPC.     Std.       Blade shut off brake     PTO Clutch       Grass catcher (optional) Capacity     350				
Fuel gauge Std.  Hour meter Std.  Easy checker Std.  Mower OPC. Std.  Travel OPC. Std.  Blade shut off brake PTO Clutch  Grass catcher (optional) Capacity ℓ 350	-			
Hour meter Std.  Easy checker Std.  Mower OPC. Std.  Travel OPC. Std.  Blade shut off brake PTO Clutch  Grass catcher (optional) Capacity   Std.  350				
Easy checker Std.  Mower OPC. Std.  Travel OPC. Std.  Blade shut off brake PTO Clutch  Grass catcher (optional) Capacity ℓ 350				
Mower OPC.Std.Travel OPC.Std.Blade shut off brakePTO ClutchGrass catcher (optional) Capacity4350				
Travel OPC. Std.  Blade shut off brake PTO Clutch  Grass catcher (optional) Capacity ℓ 350	•			
Blade shut off brake PTO Clutch  Grass catcher (optional) Capacity & 350				
Grass catcher (optional) Capacity ℓ 350				
	Grass catcher (optional)	0		
		Ł		

### **Mower Specifications**

• • • • • • • • • • • • • • • • • • •		
Cutting width	mm	1219 / 1372
Lifting device		Hydraulic
Mower mounting method		Parallel linkage
Cutting height	mm	25–102
Cutting height adjustment		Dial gauge
Cutting height increments		1/4"
Number of blades		3
Direction of discharge		Right side
Minimum uncut diameter	mm	1100 / 900
Mower deck ground clearance	mm	140



The company reserves the right to change the above specifications without notice. Please contact your local Kubota dealer for warranty information.

©2019 Kubota Corporation



**Kubota Australia Pty Ltd** 25-29 Permas Way, Truganina VIC, 3029 Australia Freecall: 1800-334-653 Email: sales@kubota.com.au

Web Site: http://www.kubota.com.au

#### **Kubota New Zealand Limited**

Freecall: 0800-582-682 Email: sales@kubota.com.au

Web Site: http://www.kubota.co.nz