




 **trimax**TM // **POWERING
PERFORMANCE.**
MOWING SYSTEMS

PRODUCT CATALOGUE.

40 / CELEBRATING
40 YEARS
1981-2021



STRIKER

Rotary Mower



PROCUT/S4

Rotary Mower



PROCUT/FM

Rotary Mower



STEALTH/S3

Rotary Mower



STEALTH/S3 SR

Rotary Mower



TOPPER

Rotary Mower



SNAKE/S2

Rotary Mower



PEGASUS/S4

Rotary Mower



X-WAM

Rotary Mower



FLAILDEK/FX

Flail Mower



FORCE

Flail Mower



EZEEMOW/FX

Flail Mower

STRIKER

**FAST BECOMING THE
MOWER OF CHOICE
AMONGST GROUNDSMEN.**



Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass 10 to 100mm. With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a cylinder mower and is ideal for educational and sports facilities where presentation is key!

TALK TO US TODAY ABOUT THE CAPABILITIES OF STRIKER IN YOUR ENVIRONMENT.



SPECIFICATIONS	150	190
Cutting Width	1460mm (57")	1940mm (76")
Overall Width	1560mm (61")	2040mm (80")
Overall Length	1160mm (46")	1160mm (46")
Height	825mm (32")	830mm (32.5")
Cut Height Range	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")
No. of Blade Spindles	3	4
Approx. Weight	312kg	384kg
Min PTO Output	25hp	30hp



"The Striker has been built to withstand all conditions, a good solid mower. We had a test mow on delivery, the grass was about 150mm high and wet, it went great, made a good even cut leaving an even spread of cut grass, we thought it was the best mower we had ever seen."

- IAN DUFTY | Morrinsville, NZ

FITMENT

Rear 3-point linkage mounted compact tractor roller mower. Suitable for tractors with a minimum of 25hp.

DESIGN AND CONSTRUCTION

Trimax Striker incorporates a unique baffle design for improved grass distribution and less clumping.

Engineered with a deep cut chamber, the Striker is able to deliver an even spread of cut out the back of the machine, creating a superb finish on a sports field.

Spindles are housed in maintenance-free fabricated steel housings with a large 6 bolt flange and each spindle has 2 Trimax LazerBladez™ mounted on spring steel blade beams.

The Striker uses a monocoque body construction from 5mm plate steel. With full width rollers front and rear the mower will not scalp over uneven ground. A comparably short mower front to rear coupled with a floating top link makes for excellent contour following. A proven and simple belt drive system using B section belts eliminates the chance of expensive gearbox damage and is easily adjusted.

APPLICATIONS

✓ Municipality ✓ Horticulture ✓ Golf ✓ School ✓ Lifestyle ✓ Sports Field

INDUSTRY LEADING WARRANTY

3
YEAR

INCLUDES SPINDLES
& GEARBOXES

EXPERIENCED SERVICE
& SUPPORT NETWORK




PRODUCT FEATURES



LOW COST OF OWNERSHIP

With only 4 grease points on the mower and with robust sealed spindles, the Trimax Striker has incredibly low maintenance requirements.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



STRIPING CAPABLE

Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.

*OPTIONAL FEATURES

✓ HELICAL ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.



SAFETY FOR PUBLIC PLACES

Striker exceeds international safety standards, and can be used with confidence in public spaces, school sports fields and confined areas.



ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cutting in the market.



COMPACT TRACTOR SUITABLE

Able to be paired with tractors as low as 25hp, the Striker is perfect for smaller budgets and compact tractors.

PROCUT/S4



**ENGINEERED TO WITHSTAND
EVERYDAY USE IN THE
TOUGHEST COMMERCIAL
ENVIRONMENTS.**



A highly versatile roller mower, the PROCUT SERIES 4 is a multi-spindled roller mower designed to give high cut quality and a great spread of clippings.

The ProCut has been a successful part of the Trimax range for over 30 years, mowing parks and reserves, school grounds and sports fields around the world – from the grounds of Windsor Castle to your local community sports fields.

The ProCut Series 4, released in 2018, is excellence refined. Now even easier to operate and maintain than ever before, the ProCut still retains many of the aspects that propelled it to become one of the best sports mowers on the market.

**TALK TO US TODAY ABOUT THE
CAPABILITIES OF PROCUT SERIES 4
IN YOUR ENVIRONMENT.**



SPECIFICATIONS	178	210	237	290
Cutting Width	1740mm (68.5")	2060mm (81")	2316mm (91")	2890mm (114")
Overall Width	1884mm (74")	2200mm (87")	2460mm (97")	3130mm (123")
Overall Length	1340mm (53")	1340mm (53")	1340mm (53")	1340mm (53")
Height	1085mm (43")	1085mm (43")	1085mm (43")	1085mm (43")
Cut Height Range	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")
No. of Blade Spindles	3	3	4	5
Approx. Weight	511kg	608kg	641kg	770kg
Min PTO Output	40hp	45hp	50hp	60hp



The ProCut is a great mower. I mow 19 schools at 40mm and the schools always comment on how nice the grounds look. I mow fast and the spread is great. I'd recommend Trimax to anyone!

- ALLEN COE | Schools Contractor, NZ

FITMENT

Rear 3-point linkage mounted tractor roller mower. Suitable for tractors with a minimum of 40hp.

DESIGN AND CONSTRUCTION

Trimax mowers are engineered with a higher number of spindles than comparable rotary mowers and have shorter blade beams which give more cuts per forward metre of travel and a fine cut. Roller bearings have been mounted inboard for better protection and are easily greasable through the side channels. The ProCut uses a monocoque body construction from 5mm plate steel. A comparably short mower front to rear and a floating top link ensures contour following on uneven ground. A proven and simple belt drive system using B section belts eliminates the chance of expensive gearbox damage and is easily adjusted.

IMPROVEMENTS OVER THE PROCUT SERIES 3

Stand on covers make coupling to the tractor safer and new quick release latches and dual wash ports ensure easy maintenance and cleaning of the belt cavity. The new LocTEK stubless roller retention system and increased strength tri-bolt bearing housing reduces maintenance significantly. The 210 model now features extended side channels for improved long grass intake. RapidSET™ height adjustment and an improved PVK holding strip have also been introduced.

APPLICATIONS

✓ Municipality ✓ Horticulture ✓ Golf ✓ School ✓ Lifestyle ✓ Sports Field ✓ Aviation ✓ Turf Farm ✓ Racecourse ✓ Polo



PRODUCT FEATURES




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



STEADFAST SEALED SPINDLES

We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from belt cavity.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides, bunkers and potholes. Also aids in striping.



ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cut in the market.

*OPTIONAL FEATURES

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ HELICAL ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ STORAGE & LIGHTING KIT

Mounts toolbox, LED road lights and safety triangle to mower.

✓ FRONT MOUNT

Convenient visibility. For tractors with out-front PTO drives only.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

PROCUT/FM

**TAKES A PADDOCK
TO HIGH LEVELS OF
PRESENTATION.**



The front mounted version of the ever-popular rear linkage mounted Trimax PROCUT.

The Trimax ProCut FM is a robust machine engineered to withstand everyday use in the toughest commercial environments yet will deliver a clean cut – every time.

In operation the front-mounted ProCut Series 4 rides on the ground on its front wheels and rear roller. The front castor wheels and rear roller follow ground contours allowing easy manoeuvrability and prevent scalping. With out-front mowing the need for the operator to look behind is reduced and the tractor wheels do not flatten the uncut grass.

**TALK TO US TODAY ABOUT THE
CAPABILITIES OF PROCUT FM
IN YOUR ENVIRONMENT.**



SPECIFICATIONS	178	210	237	290
Cutting Width	1740mm (68.5")	2060mm (81")	2316mm (91")	2890mm (114")
Overall Width	1884mm (74")	2200mm (87")	2460mm (97")	3130mm (123")
Overall Length	1340mm (53")	1340mm (53")	1340mm (53")	1340mm (53")
Height	1085mm (43")	1085mm (43")	1085mm (43")	1085mm (43")
Cut Height Range	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")
No. of Blade Spindles	3	3	4	5
Approx. Weight	511kg	608kg	641kg	770kg
Min Tractor Size	40hp	45hp	50hp	60hp

FITMENT

Rear 3-point linkage mounted tractor roller mower. Suitable for tractors with a minimum of 30-45hp.

DESIGN AND CONSTRUCTION

Trimax mowers are engineered with a higher number of spindles than comparable rotary mowers and have shorter blade beams which give more cuts per forward metre of travel and a fine cut. Roller bearings have been mounted inboard for better protection and are easily greasable through the side channels. The ProCut uses a monocoque body construction from 5mm plate steel. A comparably short mower front to rear and a floating top link ensures contour following on uneven ground. A proven and simple belt drive system using B section belts eliminates the chance of expensive gearbox damage and is easily adjusted.

IMPROVEMENTS OVER THE PROCUT SERIES 3

Stand on covers make coupling to the tractor safer and new quick release latches and dual wash ports ensure easy maintenance and cleaning of the belt cavity. The new LocTEK stubless roller retention system and increased strength tri-bolt bearing housing reduces maintenance significantly. The 210 model now features extended side channels for improved long grass intake. RapidSET™ height adjustment and an improved PVK holding strip have also been introduced.

APPLICATIONS

✓ Municipality ✓ Horticulture ✓ Golf ✓ School ✓ Lifestyle ✓ Sports Field ✓ Aviation ✓ Turf Farm ✓ Racecourse ✓ Polo



PRODUCT FEATURES




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.




STEADFAST SEALED SPINDLES

We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cut in the market.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from belt cavity.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides, bunkers and potholes. Also aids in striping.

*OPTIONAL FEATURES

✓ REAR MOUNT

Available in rear three-point linkage configuration with front and rear rollers for unmatched safety.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

STEALTH//S3



**MARKET LEADING CUT,
FINISH AND VERSATILITY.**



The STEALTH SERIES 3 has been designed to give a higher quality of cut, operate in a wider range of conditions, be safer, more robust, easier to operate and take less time to maintain than any previous STEALTH.

Backed by 30 years' of experience in market, the concept of Stealth Series 3 was born from the demand of our Australian customers for a mower that was more versatile in terms of long grass performance and more user friendly for both the operator and the workshop.

Backed by our industry leading 3-year warranty and our parts and technical support team, we know the Stealth Series 3 to be the best linkage wing mower for passive and active turf in the market.

**TALK TO US TODAY ABOUT THE CAPABILITIES
OF STEALTH SERIES 3 IN YOUR ENVIRONMENT.**



SPECIFICATIONS

340

Cutting Width	3400mm (134")
Transport Width	2416mm (95")
Overall Width	3550mm (140")
Overall Length	2416mm (95.2")
Height	1205mm (47.5")
Cut Height Range	10 - 90mm ($\frac{3}{8}$ " - $3\frac{1}{2}$ ")
No. of Blade Spindles	5
Approx. Weight	995kg
Min PTO Output	70hp



"The Stealth has brilliant decks with excellent grass dispersion and minimal greasing required. We can just jump in and cut grass!"

- ROSS HAMNER | Downer, Auckland, NZ

FITMENT

Rear 3-point linkage mounted wide area roller mower suitable for tractors with a minimum of 70hp.

DESIGN AND CONSTRUCTION

Stealth Series 3 features 5 spindles (3 on the main body, 1 on each wing) for a finer cut than comparable width rotary mowers. The spindles are housed in maintenance-free fabricated steel housings with a large 6 bolt flange. Stealth's wings have up and down float for contour following ability and fold up (using hydraulic rams) to reduce mower width to 2.4m for road travel.

The Stealth uses a monocoque body construction from 5mm plate steel. Skids fitted to the outside of the wings are made from wear resistant steel for 3x longer life. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

✓ IMPROVEMENTS OVER THE STEALTH SERIES 2

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenance free spindles and composite maintenance free bushes. Stealth wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for higher quality of cut and easy cleaning.

APPLICATIONS

✓ Municipality ✓ Golf ✓ School ✓ Sports Field ✓ Aviation ✓ Turf Farm ✓ Racecourse



PRODUCT FEATURES




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



LOW MAINTENANCE

Operators are no longer required to grease hinge points and spindles on a daily basis and can spend more time mowing and less time on maintenance.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



REMOTE UNLOCK

Remote unlock operates the mower wing locks with the push of a button from within the tractor cab. Electric or hydraulic actuation is available.



GREATER MOWING VERSATILITY

The improved cutting chamber and baffle design directs airflow from the blades out and over the rear roller for a better cut and spread.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from belt cavity.



ANTI-WEAR SKIDS

Anti-wear skids reduce wear on side channels when operating in rough or uneven terrain.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.

*OPTIONAL FEATURES

✓ HELICAL ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ INDIVIDUAL WING LIFT

Individual wing lift allows independent lift of either side deck for reduced cutting in confined spaces.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE STANDS

Lockable stands for safe underside access.

✓ SAFETY & STORAGE KIT

Mounts toolbox, LED road lights and safety triangle to mower.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

STEALTH SR

**PURPOSE BUILT FOR
ROADSIDE, OPEN SPACE AND
LONG GRASS APPLICATIONS**

The Trimax STEALTH SR combines the cut quality, safety, robustness, decreased maintenance time, and easy operation of STEALTH SERIES 3 with enhanced performance in long grass.

With even more versatility than the Stealth Series 3 for long grass applications, the Stealth SR is purpose-built for an excellent cut for grass up to 500mm. The cutting chamber and baffle design are optimised to provide a better finish and spread at higher cut heights.

New and improved design features make the Stealth SR safer, more operator friendly, and easier to maintain than ever.

**TALK TO US TODAY ABOUT THE CAPABILITIES
OF STEALTH SR IN YOUR ENVIRONMENT.**



SPECIFICATIONS

340

Cutting Width	3400mm (134")
Transport Width	2416mm (95")
Overall Width	3550mm (140")
Overall Length	1625mm (64")
Transport Height	1205mm (47.5")
Cut Height Range	40 - 90mm (1½" - 3½")
No. of Blade Spindles	5
Approx. Weight	900 kg
Min PTO Output	60 hp

FITMENT

Rear 3-point linkage mounted wide area roller mower suitable for tractors with a minimum of 70hp.

DESIGN AND CONSTRUCTION

Stealth SR features 5 spindles (3 on the main body, 1 on each wing) for a finer cut than comparable width rotary mowers. The spindles are housed in maintenance-free fabricated steel housings with a large 6 bolt flange. Stealth's wings have up and down float for contour following ability and fold up (using hydraulic rams) to reduce mower width to 2.4m for road travel.

The Stealth SR uses a monocoque body construction from 5mm plate steel. Skids fitted to the outside of the wings are made from wear-resistant steel for 3x longer life. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

✓ IMPROVEMENTS OVER THE STEALTH SERIES 2

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenance-free spindles and composite maintenance-free bushes. Stealth SR wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for higher quality of cut and easy cleaning.

APPLICATIONS

✓ Municipality ✓ Golf ✓ School ✓ Sports Field ✓ Aviation ✓ Turf Farm ✓ Racecourse



PRODUCT FEATURES




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



LONG GRASS PERFORMANCE

Designed to mow grass up to 500mm high and achieve the quality cut you expect from Trimax.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.

*OPTIONAL FEATURES

✓ INDIVIDUAL WING LIFT

Individual wing lift allows independent lift of either side deck for reduced cutting in confined spaces.

✓ SERVICE STANDS

Lockable stands for safe underside access.

✓ SAFETY & STORAGE KIT

Mounts toolbox, LED road lights and safety triangle to mower.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.



ANTI-SCALP ROLLER

A raised front roller provides anti-scalp protection for your turf without impacting long grass performance.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.




EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



REMOTE UNLOCK

Remote unlock operates the mower wing locks with the push of a button from within the tractor cab. Electric or hydraulic actuation is available.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.



LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.

TOPPER

**TRIMAX CUTTING
INNOVATION
FOR INCREASED
PRODUCTION.**



The Trimax TOPPER cuts pasture quickly and efficiently and has multiple features enabling its use on lower hp tractors.


Small diameter blades turning at high speed on the Topper mean more cuts per forward metre of travel than comparable pasture toppers, giving a finer cut and increasing regrowth and pasture quality. Very high under-body clearance and the open deck design allows good flow of grass into the mowing deck and a clean ejection of cut grass.

Powered by a proven belt drive system, the Trimax Topper is more efficient than comparable shaft drive pasture toppers. Short in body from front to rear and mounting close to the tractor the Topper is able to be used on smaller tractors for large cut widths and also enables a smaller turning radius for easier access into tight corners.

TALK TO US TODAY ABOUT THE CAPABILITIES OF TOPPER IN YOUR ENVIRONMENT.



SPECIFICATIONS	237	282
Cutting Width	2316mm (91")	2740mm (107")
Overall Width	2460mm (97")	2880mm (113")
Overall Length	1316mm (51")	1240mm (48")
Cut Height Range	20 - 160mm ($\frac{3}{4}$ " - $6\frac{1}{4}$ ")	20 - 160mm ($\frac{3}{4}$ " - $6\frac{1}{4}$ ")
No. of Blade Spindles	4	4
Approx. Weight	575kg	625kg
Min Tractor HP	50hp	60hp



We use the Topper to keep up the quality of the grass behind the cows. The farm tends to grow a lot of grass early on in the season and it's hard to control, even with silage, so we top to keep the quality up. We get a nice clean cut which means you get good regrowth. I wouldn't buy anything else.

- IAN WILCOX | Farmer, Matamata, NZ

FITMENT

Rear 3-point linkage mounted mower for tractors with a minimum of 50hp

DESIGN AND CONSTRUCTION

Trimax Topper has 4 cast iron spindle housings. Each Topper spindle has 2 LazerBladez™ mounted on a spring steel blade beam. A floating head stock and replaceable wear skids give good contour following ability. An easily adjustable belt drive protects the gearbox from impact damage. The Topper uses a monocoque body construction from 5mm plate steel.

APPLICATIONS

✓ Agriculture ✓ Aviation



THE BENEFITS OF PASTURE TOPPING.


- › IMPROVES FEED QUALITY
- › INCREASES FARM PROFITABILITY
- › INCREASES MS PRODUCTION
- › PROMOTES FASTER RE-GROWTH

PRODUCT FEATURES



LOW HP REQUIREMENTS

Open deck design for grass processing, efficient belt drive system and a short mower front to rear allows for use on lower HP tractors.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



ADVANCED DESIGN

Short front to rear and mounting close to the tractor allowing better manoeuvrability. High under body clearance and open deck design for increased grass production.



HIGH SPINDLE SPEEDS

More spindles, higher spindle speeds and shorter blade beams yield more cuts per forward meter of travel and a much finer clip.



ANTI-BLOCK SYSTEM

High tensile spindles feature anti-wrap pins preventing frustrating blockages around spindles in extreme conditions.



IMPROVES FEED QUALITY

Topping controls poor quality pasture components such as seed-heads and thistles and prevents their reoccurrence.



*REAR ROLLER

The Topper can be fitted with a rear roller, which ensures that in undulating environments you'll have increased protection from scalping.

SNAKE/S2



**WORLD CLASS
CUT QUALITY AND
ARTICULATION.**




The Trimax SNAKE is used on some of the most prestigious golf courses around the world. The cutting system has been studied by the Sports Turf Institute of New Zealand and declared to produce a cut of equal quality to cylinder mowers however with the versatility and reliability of our famous rotary design.

An accumulation of over 30 years of Trimax innovation, engineering and customer insight, the Snake has been designed specifically for sports turf and golf courses. We've seamlessly combined our world class cut quality and articulation capabilities and believe we've created the best sports turf rotary mower in the world. Built for agility, incredibly robust and extremely low maintenance the Trimax Snake won't fail to impress.

**TALK TO US TODAY ABOUT THE CAPABILITIES
OF SNAKE SERIES 2 IN YOUR ENVIRONMENT.**



SPECIFICATIONS	320	400
Cutting Width	3234mm (127")	3985mm (157")
Overall Width	3372mm (133")	4110mm (162")
Overall Length	3500mm (138")	3500mm (138")
Transport Width	2100mm (82½")	2140mm (84¼")
Transport Height	1860mm (73")	2232mm (88")
Cut Height Range	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")
No. of Blade Spindles	9	11
Approx. Weight	1280kg	1580kg
Min Tractor HP	35hp	40hp
Recommended HP	50 - 60hp	60 - 70hp



"The first time I saw the Snake cut the grass I was really impressed at the speed and the striping finish. I'd recommend the Snake to anyone."

- ROY | Head Groundsman, Hampton Downs, NZ

FITMENT

Trailed PTO driven multi-deck roller mower suitable for tractors with a minimum of 35hp. Recommended minimum of 50-60hp for Snake 3.2m and 60-70hp for Snake 4m

DESIGN AND CONSTRUCTION

Each of Trimax Snake's three mowing decks have spindles fitted with LazerBladez™ that have very high spindle speeds which increase the number of cuts per forward metre of travel giving a finer cut than comparable rotary mowers. Folding for transport and easily towed behind a compact tractor, the Snake is a cost effective alternative to traditional and expensive self-propelled options. Engineered with a low centre of gravity and with transport locks, road transport of the Snake is safe and easy. The Snake uses a monocoque body construction from 5mm plate steel. A proven and simple belt drive system eliminates the chance of expensive gearbox damage. Automatic belt tensioners ensure maximum drive to the blades at all times.

✓ IMPROVEMENTS OVER THE SNAKE SERIES 1

The Snake Series 2 includes the new Trimax LoTEK stubless roller bearing retention system. The roller thickness has been increased to 5mm. The Snake now features replaceable axle stubs, a 90 degree rotatable jack stand and maintenance free pivot bushes.

APPLICATIONS

✓ Municipality ✓ Golf ✓ School ✓ Sports Field ✓ Turf Farm



PRODUCT FEATURES




LOCOTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



AUTOMATIC BELT TENSIONERS

Automatic belt tensioners eliminate the need for belt adjustments and improves drive to the spindles and blades.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides, bunkers and potholes. Also aides in striping.



QUIKLIFT

QuikLIFT enables decks to be raised slightly for traversing paths without the need to disengage the PTO. Also aides in striping.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



ZERO TURN

Allows continuous cutting while turning sharply for maximum productivity.



ARTICULATION ABILITY

With three articulating decks the Snake has the ability to follow contours.



LOW MAINTENANCE

SteadFast sealed spindles have eliminated the tedious task of regular greasing. Snake Series 2 now also features maintenance free pivot bushes.

*OPTIONAL FEATURES

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ HELICAL ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ MULTI LIFT SYSTEM

Five different lift functions for mower decks. Now with Drive Protect.

✓ ROAD RATED TYRE

Tow at highway speeds on the road.

✓ REMOTE UNLOCK

Unlocks decks electronically or hydraulically from the tractor seat.

✓ MUDGUARDS, LIGHTS, & CHAINS

Add LED tail light clusters, safety chains, and transport wheel mudguards for increased safety during road transportation.

PEGASUS S4



**THE BENCHMARK
IN WIDE AREA MOWING.**



The PEGASUS has established itself globally as the benchmark in wide-area mowing for parks, reserves, sports fields and turf farms.

The Trimax Pegasus was the world's first multi-deck roller mower and has been a successful part of the Trimax range for more than 17 years. The Pegasus has articulation capacity and is engineered to be incredibly robust for full-time commercial use.

Available in 4.9m, 6.1m and 7.2m widths the Pegasus Series 4 is our newest and lowest maintenance version of the trailed mower. With its wide cutting widths and ability to mow at speeds up to 15kms per hour on flat terrain, the Pegasus is one extremely efficient mower.

**TALK TO US TODAY ABOUT THE CAPABILITIES
OF PEGASUS SERIES 4 IN YOUR
ENVIRONMENT.**



722
Available in
Gals only

SPECIFICATIONS	493	610	722
Cutting Width	4926mm (194")	6074mm (293")	7235mm (285")
Overall Width	5082mm (200")	6230mm (245")	7366mm (290")
Overall Length	4375mm (172")	4375mm (172")	4375mm (172")
Transport Width	2500mm (98")	2500mm (98")	2500mm (98")
Transport Height	2600mm (102")	3200mm (126")	3800mm (150")
Cut Height Range	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")
No. of Blade Spindles	9	11	13
Approx. Weight	2180kg	2409kg	2700kg
Min Tractor HP	50hp	65hp	75hp
Recommended HP	75 - 85hp	95 - 105hp	110 - 120hp

FITMENT

Trailed PTO driven wide area mower suitable for tractors with a minimum of 50hp.

DESIGN AND CONSTRUCTION

Pegasus has 3 multi-spindle double roller mowing decks on a roadworthy chassis that folds to 2.5m for road transport. Mowing decks have a physical safety lock and a safety lanyard for travel in the raised position. Pegasus comes standard with mudguards, lights and drawbar safety chains.

With Trimax LazerBladez™ and multiple spindles with shorter blade beams, the Pegasus gives more cuts per forward metre of travel and produces a finer cut than comparable rotary mowers. The Pegasus uses a monocoque body construction from 5mm plate steel. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

IMPROVEMENTS OVER THE PEGASUS SERIES 3

The Pegasus Series 4 includes the new Trimax LocTEK stubless roller bearing retention system, and reduced grease points resulting in a 35% reduction in maintenance costs. Other improvements include RapidSET™ height adjustment, easily replaceable side channel bolts, and a waterproof lighting loom. Also setting the standard for both safety and functionality is the new Drive Protect System which can be found on all lift options.

APPLICATIONS

✓ Municipality ✓ Horticulture ✓ Golf ✓ School ✓ Lifestyle ✓ Sports Field ✓ Aviation ✓ Turf Farm ✓ Racecourse ✓ Polo



PRODUCT FEATURES




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



SUSPENSION

The Pegasus is fitted with a Duratorque Suspension System capable of highway speeds.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



LOW MAINTENANCE

We've introduced new features such as our SteadFast sealed spindles and long life synthetic bushes which has reduced maintenance by 35%.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions allow mowing over kerbsides and bunkers and potholes. Also aids in striping.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



WHEELS RUN ON CUT GRASS

As the rear deck is located between the rear transport wheels, grass is not flattened by wheels prior to mowing, a feature unique to Trimax.



ROAD TRANSPORTABLE

Equipped with a roadworthy chassis, the Pegasus is capable of being towed at highway speeds (subject to local road regulations).

*OPTIONAL FEATURES

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ HELICAL ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ MULTI LIFT SYSTEM

Five different lift functions for mower decks. Now with Drive Protect.

✓ TURF TYRE

Distributes mower weight for less ground disturbance.

✓ REMOTE UNLOCK

Unlocks decks electronically or hydraulically from the tractor seat.

✓ ELECTRIC BRAKES

Reduces braking force required by the tractor.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SPARE TYRE KIT

Mounts a spare wheel to the rear mowing deck.

✓ ROAD REGISTRATION LIGHTING KIT

Adds reflectors, LED lights, and beacon mounting pole.

✓ QUIKLIFT

Raises mower decks slightly without disengaging the PTO.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

X-WAM



**THE ULTIMATE IN WIDE
AREA MOWING WHEN
QUALITY COUNTS.**



The X-WAM has superior contour-following abilities based on the unique combination of five individual floating decks on an articulated axis.

With the potential to cut 13 hectares per hour and the ability to perform zero-turns without having to lift any of the mower decks, the X-WAM will increase your productivity and efficiency using only one tractor, one driver, and one mower.

Providing an even discharge of clippings and with the ability to mow in wet conditions and produce a cylinder-like patterned finish, X-WAM is the ultimate wide area mower.


**TALK TO US TODAY ABOUT THE CAPABILITIES
OF X-WAM IN YOUR ENVIRONMENT.**



SPECIFICATIONS

10400

Cutting Width	10410mm (410")
Overall Width	10540mm (415")
Overall Length	5830mm (229")
Transport Width	2740mm (108")
Transport Height	4450mm (177")
Cut Height Range	10 - 100mm (3/8" - 4")
No. of Blade Spindles	19
Approx. Weight	4880kg
Min Tractor HP	100hp



Trimax X-WAM is great equipment. It replaced one tractor, one employee and reduced mowing time. Less equipment to maintain and less equipment expense has increased our profitability.

- LYNN GIBB | Hope Plantation Turf, Texas USA

FITMENT

Trailed PTO driven wide area mower suitable for tractors with a minimum of 100hp.

DESIGN AND CONSTRUCTION

X-WAM is available as a kit to add to a Pegasus 610, or as a complete model. The X-WAM consists of 2 decks and a chassis, and can be joined with a Pegasus chassis for a total of 5 decks. All the decks can be folded and retracted to 2.7m for road transport. Decks compact down to lower the centre of gravity so the machine is more stable on the road.

With Trimax LazerBladez™ and multiple spindles with shorter blade beams the X-WAM gives more cuts per forward metre of travel and a finer cut than comparable rotary mowers. The X-WAM uses a monocoque body construction from 5mm plate steel. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

APPLICATIONS

- ✓ Turf Farm



PRODUCT FEATURES




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



FULL HYDRAULIC OPERATION

The X-WAM uses full hydraulic operation for deck retraction into road transport mode.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



WHEELS RUN ON CUT GRASS

As the rear deck is located between the rear transport wheels, grass is not flattened by wheels prior to mowing, a feature unique to Trimax.



LOW MAINTENANCE

All moving surfaces have long life synthetic bushes or greasable bearings and remote grease points for hassle-free maintenance.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



TURF TYRE

Trimax Turf Tyres help distribute the weight of the mower for less ground disturbance. Recommended for Turf Farms or fine turf applications.



ULTIMATE CONTOUR FOLLOWING

Contour following and cut quality is compromised when decks are over 3m wide. The X-WAM features multiple smaller decks for superior cut quality.



STEADFAST SEALED SPINDLES

We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.

*OPTIONAL FEATURES

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ HELICAL ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

FLAILDEK/FX

**TRIMAX FLAIL
TECHNOLOGY
FOR OUT FRONT
OPERATION.**



The Trimax FlailDek FX offers a high-performance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, schools and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 25mm in diameter, mow high grass and using the unique converter flap is suitable for sports fields and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

**TALK TO US TODAY ABOUT THE CAPABILITIES
OF FLAILDEK FX IN YOUR ENVIRONMENT.**



SPECIFICATIONS	135	155	185
Cutting Width	1360mm (54")	1520mm (60")	1830mm (72")
Overall Width	1560mm (61")	1720mm (68")	2045mm (81")
Overall Length	1095mm (43")	1095mm (43")	1095mm (43")
Overall Height	370mm (14.5")	370mm (14.5")	370mm (14.5")
Cut Height Range	20 - 100mm (¾" - 4")	20 - 100mm (¾" - 4")	20 - 100mm (¾" - 4")
Approx. Weight	210kg	225kg	250kg
Total Belts	2	2	2
No. of Flails	28	32	40
Min PTO Output	*Front mount HP's vary between tractor brands.		
Hydraulic Drive	N/A	Optional	N/A



"This year I could not have coped without anything other than a Trimax FlailDek, it's versatile, cuts rough and fine grass even in the wet conditions and copes with it easily."

- ANDREW HALL | Truelink Ltd

FITMENT

A front mounted flail mower that can be fitted to a wide range of tractors including John Deere, Kubota, Iseki, New Holland and Shibaura out-front tractors. FlailDek FX is supplied complete with mounting arms and PTOs to suit the brand of tractor. Minimum hp recommendations vary between tractor brands.

DESIGN AND CONSTRUCTION

The FlailDek FX has a low compact design which mounts close to the tractor. Mounted by linkage arm adapters and quick hitch using one pin, the mower floats independently and lifts high for kerb clearance. The front of the body aperture is very open and is fitted with a row of hinged safety flaps which fold back to allow standing vegetation easy entry yet contain any thrown objects. Roller bearings are encased in protective housings. The FlailDek uses a monocoque body construction made from 3mm high tensile plate steel.

✓ THE CONVERTER™ FEATURE

The Converter™ feature is unique to Trimax and changes a versatile “jack-of-all trades” flail mower into a machine that is a master of widely differing conditions. In the short grass configuration it excels when mowing quality turf, lifting each blade to eliminate wheel marks. Move the Converter and the same machine transforms metre-high grass and stalky weeds into lawn in a single pass.

APPLICATIONS

✓ Municipality ✓ Horticulture ✓ Golf ✓ School ✓ Lifestyle ✓ Sports Field ✓ Aviation ✓ Turf Farm ✓ Racecourse



PRODUCT FEATURES



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments, lift converter for increased productivity.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tires are impossible to puncture.



WEAR RESISTANT SKIDS

Wear resistant trailing skids made from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.



NEW IMPROVED ROTOR

Designed to withstand the toughest environments, our new rotor is more durable ensuring downtime is kept to an absolute minimum.



P 1800 874 629 // info@trimaxmowers.com.au
80 Agar Drive, Truganina 3029, Victoria, Australia

[f](#) [t](#) [i](#) [y](#) [v](#) // TRIMAXMOWERS.COM.AU

TRIMAX FORCE



**A HIGH-UTILITY
HEAVY-DUTY
POWERHOUSE.**



The Trimax **FORCE** is the multitool mower and mulcher you need to get the job done, no matter what that job might be. Turn long grass and large prunings into an expertly trimmed and finely mulched field in a single pass.

Built on the successes of the Trimax Warlord S3 flail mower, innovative new features increase the durability and safety and reduce service requirements all while maintaining Trimax's signature ultra-low cost of ownership. A wide range of available options allows you to perfectly configure your machine to suit your specific application. For reliable productivity and excellent results, the Trimax Force is the ultimate choice.



SPECS	175	205	235
Cutting Width	1730mm (68 1/8")	2017mm (79 3/8")	2296mm (90 3/8")
Overall Width	2022mm (79 5/8")	2310mm (91")	2588mm (101 7/8")
Overall Length	1149mm (45 1/4")	1149mm (45 1/4")	1149mm (45 1/4")
Overall Height	500mm (19 3/4")	500mm (19 3/4")	500mm (19 3/4")
Cut Height Range	0-60mm (2 3/8")	0-60mm (2 3/8")	0-60mm (2 3/8")
Approx. Weight	785kg (1730lb)	845kg (1863lb)	900kg (1984lb)
Min PTO Output	40hp	44hp	49hp
Flails	24	28	32

**TALK TO US TODAY ABOUT THE CAPABILITIES OF
THE TRIMAX FORCE IN YOUR ENVIRONMENT.**

WHAT'S SO GREAT ABOUT THE TRIMAX FORCE?

LEARN MORE ABOUT THE FEATURES OF TRIMAX'S NEWEST MOWER.

DISTRIBUTED FROM OUR
AUS
WAREHOUSE



INCREASED ROBUSTNESS.

Heavy-duty body with 50% thicker endplates for ultimate durability.

✓ REPLACEABLE INTERNAL LINER

Steel liner in cutting chamber high-impact zone for 3x durability.

✓ WRAP PROTECTION

Prevent damage from wire or netting.

✓ NEW ROTOR BEARING ASSEMBLY

35% and 50% increase in static and dynamic load capacity (respectively).

✓ SMOOTH EXTERNAL PROFILE

Avoid catching on vines and branches.

✓ HEAVY-DUTY SKIDS & ROBUST ROLLER

Thick high-wear steel, independently adjustable for easy removal or replacement.



EXPANDED VERSATILITY.

Perfectly customise your mower with our widest range of available options yet.

✓ WIDE TRACTOR COMPATIBILITY

Meets CAT1, CAT2, and CAT2n ISO standards.

✓ FRONT OR REAR MOUNT

With reversible head stock.

✓ MOW CLOSER TO OBSTACLES

27% less distance between edge of cut and edge of mower.

✓ LEFT- OR RIGHT-HAND OFFSET

Also available as centre-mount.

✓ HYDRAULIC SIDE SHIFT

Available on select models.



LOWER MAINTENANCE.

Reduce time spent servicing with easy access points and maintenance-free features

✓ AUTO BELT TENSIONING

Improves drive to rotor without manual belt adjustments.

✓ QUICK ACCESS GREASE POINTS

No need to remove guards or covers.

✓ IMPROVED PRUNING GUIDE

Reduces debris collection and guides material into cutting chamber.

✓ MAINTENANCE-FREE ROLLER BEARINGS

Eliminate greasing requirements.

SERIOUS ABOUT SAFETY.

The Trimax Force meets international safety standards for thrown object testing and finger and limb access in every configuration.



OTHER OPTIONAL FEATURES

- Heavy Duty Liner / increased durability in the high impact zone.
- Heavy Duty Roller / increase roller wall thickness from 5mm to 11mm.
- Roller Scrapers / cleans clippings from roller during operation.
- Storage & Lighting Kit / mounts toolbox, LED road lights and safety triangle to mower.



VIEW IT ONLINE:

trimax MOWING SYSTEMS // **POWERING PERFORMANCE.**

P 1800 874 629 // info@trimaxmowers.com.au
80 Agar Drive, Truganina 3029, Victoria, Australia

f t i y v // TRIMAXMOWERS.COM.AU

EZEEMOW//FX



**TRIMAX FLAIL
TECHNOLOGY FOR
COMPACT TRACTORS.**



The new EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension, Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 25mm in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for contractors, councils, roadsides, estates, and orchard applications.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership yet deliver maximum reliability.

TALK TO US TODAY ABOUT THE CAPABILITIES OF EZEEMOW FX IN YOUR ENVIRONMENT.



SPECIFICATIONS	135	155	185
Cutting Width	1360mm (54")	1520mm (60")	1830mm (72")
Overall Width	1560mm (61")	1720mm (68")	2045mm (81")
Overall Length	583mm (23")	583mm (23")	583mm (23")
Overall Height	370mm (14.5")	382mm (15")	382mm (15")
Cut Height Range	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")	10 - 100mm ($\frac{3}{8}$ " - 4")
Approx. Weight	198kg	228kg	245kg
Total Belts	2	2	2
No. of Flails	28	32	40
Min PTO Output	17hp	20hp	24hp



"I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same gearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model. no two ways about it!"

- **STEVE DE BRUIN** | Grass Cutting Services, Tauranga NZ

FITMENT

Rear 3-point linkage mounted compact flail mower suitable for tractors with a minimum of 17-24hp.

DESIGN AND CONSTRUCTION

The Ezeemow FX has a low and compact design which mounts close to the tractor. The front of the body aperture is very open and is fitted with a row of hinged safety flaps which fold back to allow standing vegetation easy entry yet contain any thrown objects. The Ezeemow uses a monocoque body construction made from 3mm high tensile plate steel.

✓ IMPROVEMENTS OVER THE ORIGINAL EZEEMOW

Ezeemow FX is a total re-design of the original Ezeemow mower with a change in construction to a high tensile steel, a larger diameter rotor (70% stronger) and forged steel Gamma Flails™. A stronger gearbox has been used and an improved belt tensioning system. The full width rear roller is now easily height adjustable.

✓ THE CONVERTER™ FEATURE

The Converter™ feature is unique to Trimax and changes a versatile “jack-of-all trades” flail mower into a machine that is a master of widely differing conditions. In the short grass configuration it excels when mowing quality turf, lifting each blade to eliminate wheel marks. Move the Converter and the same machine transforms metre-high grass and stalky weeds into lawn in a single pass.

APPLICATIONS

✓ Municipality ✓ Horticulture ✓ Horse Agistment



PRODUCT FEATURES



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the Ezeemow FX to expel debris in a downward direction behind the mower.



NEW IMPROVED ROTOR

Designed to withstand the toughest environments, our new rotor is more durable ensuring downtime is kept to an absolute minimum.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.

*OPTIONAL FEATURES

✓ UNIQUE CONVERTER

Change the position of the converter flap to suit your application. Go from mowing to mulching in seconds.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.






*RIGHT-HAND OFFSET

Available in offset or centre mount to suit your mowing requirements

EZEEMOW OFFSET DIAGRAM

ONLY AVAILABLE IN FIXED
CENTRE MOUNT OR
OFFSET POSITIONS

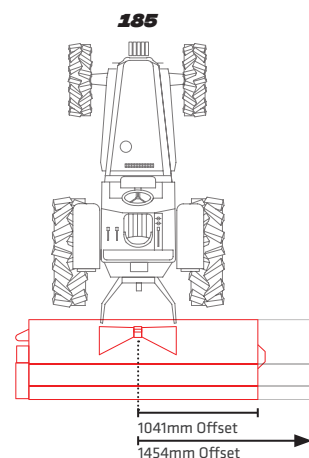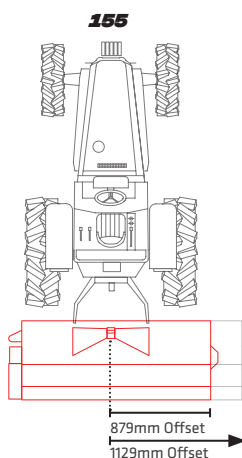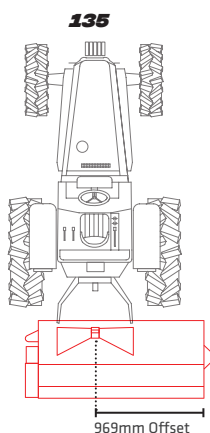

TRIMAX GENUINE PARTS AND SERVICE.

WITH LOCAL SERVICE AND
SUPPORT STAFF AND FULLY
STOCKED PARTS WAREHOUSES,
TRIMAX IS HERE TO KEEP YOU
MOWING.

- NITESH PRASAD
Spare Parts Manager,
Trimax Mowing Systems

- JAYDEN SMITH
Service Specialist,
Trimax Mowing Systems

"We believe our service model is one
of the best in the industry"



PROVEN PERFORMANCE.

Every part of your Trimax mower has been engineered and optimised for reliability, durability, low maintenance, and unrivaled cut presentation. **Trimax Genuine Parts** maintain the high quality and performance you expect from your Trimax mower.



THE LATEST IMPROVEMENTS.

Our innovations include improvements to the mowers already on your grounds. **Trimax Genuine Parts** are kept up to date with our latest developments, so your machine continues to benefit from our learning and experience even after years of operation.

**OUR CONFIDENCE IN THE DURABILITY AND
PERFORMANCE OF TRIMAX GENUINE PARTS
ALLOWS US TO OFFER AN INDUSTRY-LEADING
3-YEAR WARRANTY.**

INDUSTRY LEADING WARRANTY

**3
YEAR**

INCLUDES SPINDLES
& GEARBOXES

EXPERIENCED SERVICE
& SUPPORT NETWORK



SAVE TIME.

We know downtime is not an option. With **Trimax Genuine Parts**, you can expedite the identification, ordering, stocking, and fitting of parts on your mower to keep your repair and maintenance cycle running smoothly.



STAY SAFE.

Each Trimax mower has been carefully designed and rigorously tested to ensure that it meets required safety specifications for your protection. We can guarantee that **Trimax Genuine Parts** will uphold the high safety standards of your machine.



WE CAN HELP.

We pride ourselves on our service model and believe it to be one of the best in the industry. Our highly trained service experts have a wealth of knowledge about Trimax mowers and Genuine Parts and are available to provide technical support.

**DON'T SETTLE FOR LESS THAN THE REAL THING.
CONTACT US ABOUT TRIMAX GENUINE PARTS TODAY.**



P 1800 874 629 // info@trimaxmowers.com.au
80 Agar Drive, Truganina 3029, Victoria, Australia

f t i y v // TRIMAXMOWERS.COM.AU

FIND US ONLINE.

WEBSITE / TRIMAXMOWERS.COM.AU

Information, photos, and videos of our mowers are easily accessible on our website. Check in often for updates from Trimax!



The screenshot shows the Trimax website homepage. The header includes the Trimax logo and navigation links: OUR STORY, NEWS, CAREERS, CONTACT TRIMAX, CHANGE REGION, and a location dropdown. The main navigation bar lists: MOWERS BY APPLICATION, ROTARY MOWERS, FLAIL MOWERS, CUSTOMER SUPPORT, and DEALER CENTRE. The featured section is titled "PROCUT S4 FEATURES." and lists several features with icons and descriptions:

- ACCURATE SPINDLE SETTING TECHNOLOGY**: Spindle height is perfectly aligned providing the most accurate cut possible.
- STEADFAST SPINDLES**: With no spindle greasing required maintenance is extremely low and productivity enhanced.
- BELT CAVITY DUAL WASH FLAPS**: Provides easy access for removal of grass and drainage of water from belt cavity.
- LAZERBLADEZ**: Achieves a superior cut and finish and are more cost efficient than reels or solid blade beams.
- STAND ON COVERS**: Provides safe and easy access to the rear of the tractor when coupling the mower.
- LOCOTEK ROLLER BEARING RETENTION SYSTEM**: A stainless roller retention system for vastly improved alignment, bearing life and replacement ease.
- RAPIDSET HEIGHT ADJUSTMENT**: Clearly displayed cut height indicators allow for simple and easy alteration or resetting of cut heights.
- 3 YEAR WARRANTY**: We build mowers that last and we back them up with a 3 year industry leading warranty.
- FULL WIDTH ROLLERS**: Full width front and rear rollers follow contours and provide excellent anti-scalp protection.

WEB SHOP / SHOP.TRIMAXMOWERS.COM.AU

Look up and order Trimax Genuine Parts and access resources including service videos, operator manuals, parts lists, and more.



The screenshot shows the Trimax web shop homepage. The header includes the Trimax logo and navigation links: RETURN TO MAIN TRIMAX WEBSITE, MY CART, CHECKOUT, CHANGE REGION, and a location dropdown. The main navigation bar lists: COMMON PARTS, ROTARY MOWERS, FLAIL MOWERS, KITS, RESOURCES, and CONTACT US. The featured section is titled "WELCOME TO THE TRIMAX WEB SHOP WHERE YOU CAN SOURCE GENUINE TRIMAX PARTS" and includes a search bar. The "TRIMAX BESTSELLERS" section displays five products:

- LAZERBLADE [411-160-842]**: Used on: Merlin Pegasus S2 Pegasus S3 Procure S3 Snake Stealth Original Stealth S1 Front Mount...
- BOLT [411-322-050]**: Used on: Merlin Pegasus S2 Pegasus S3 Procure S3 Snake Stealth Original Stealth S1 Front Mount...
- BUSH [402-060-750]**: Used on: Ezeemow FX Ezeemow S1 Ezeemow S2 Flaildek FX Flaildek S2 Pegasus S3.
- FLAIL [411-160-105]**: Used on: Ezeemow FX Ezeemow S2 Flaildek FX Flaildek S2.
- LAZERBLADE [411-160-840]**: Used on: Pegasus S3 Pegasus S4.

At the bottom, a banner reads: "1,000'S OF ONLINE PARTS LISTINGS WITH SAME DAY DISPATCH*" and "Shop the Trimax Parts Store today!". A note below states: "*Same day dispatch is applicable on orders received before 1:30pm".