



Made in Australia

BERENDS

Hydraulic Grader Blade

"The ultimate in grader blades - alter, tilt and offset from your tractor seat"

Easily adjustable grader blade designed for road maintenance, fire breaks, scrub clearance and general farm work.

Hydraulic offset (3 ram model) or manual offset (2 ram model)

Up to 45° hydraulic angle adjustment both ways. Exclusive patented swivel assembly gives superior strength and reliability and eliminates pivot pin stress often seen in other brands.

Hydraulic tilt


MODEL	8' 2 RAM	8' 3 RAM	10' 2 RAM	10' 3 RAM
Code	0014	0013	0028	0017
Cutting width	2400mm	2400mm	3000mm	3000mm
Offset (+/- 600mm)	Manual	Hydraulic	Manual	Hydraulic
Tilt	Hydraulic +/- 30°	Hydraulic +/- 30°	Hydraulic +/- 30°	Hydraulic +/- 30°
Angle	Hydraulic +/- 45°	Hydraulic +/- 45°	Hydraulic +/- 45°	Hydraulic +/- 45°
Weight (less wheel)	555kg	555kg	603kg	603kg



14" Holden depth wheel makes grading roads an ease. Has 360° rotation. Available in manual or hydraulic adjustment

Curved 10mm reinforced mouldboard with heavily gusseted corners for strength where it counts.

Strong bearing support make this one of the best wheelkits on the market

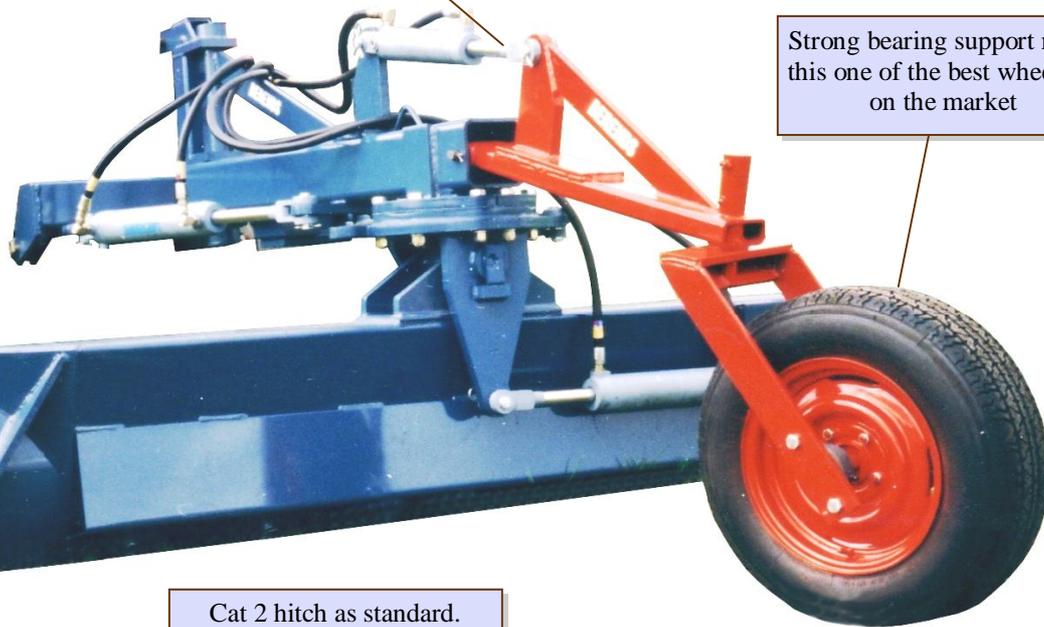


Hardened reversible cutting edge. Blade can be reversed for back blading work


Cat 2 hitch as standard. Other linkage and quickhitch options on request.

Optional diverter kits (electric or manual) are available to allow 3 ram models to be used on tractors with one single/dual remotes

Patented Turntable - no pivot pin

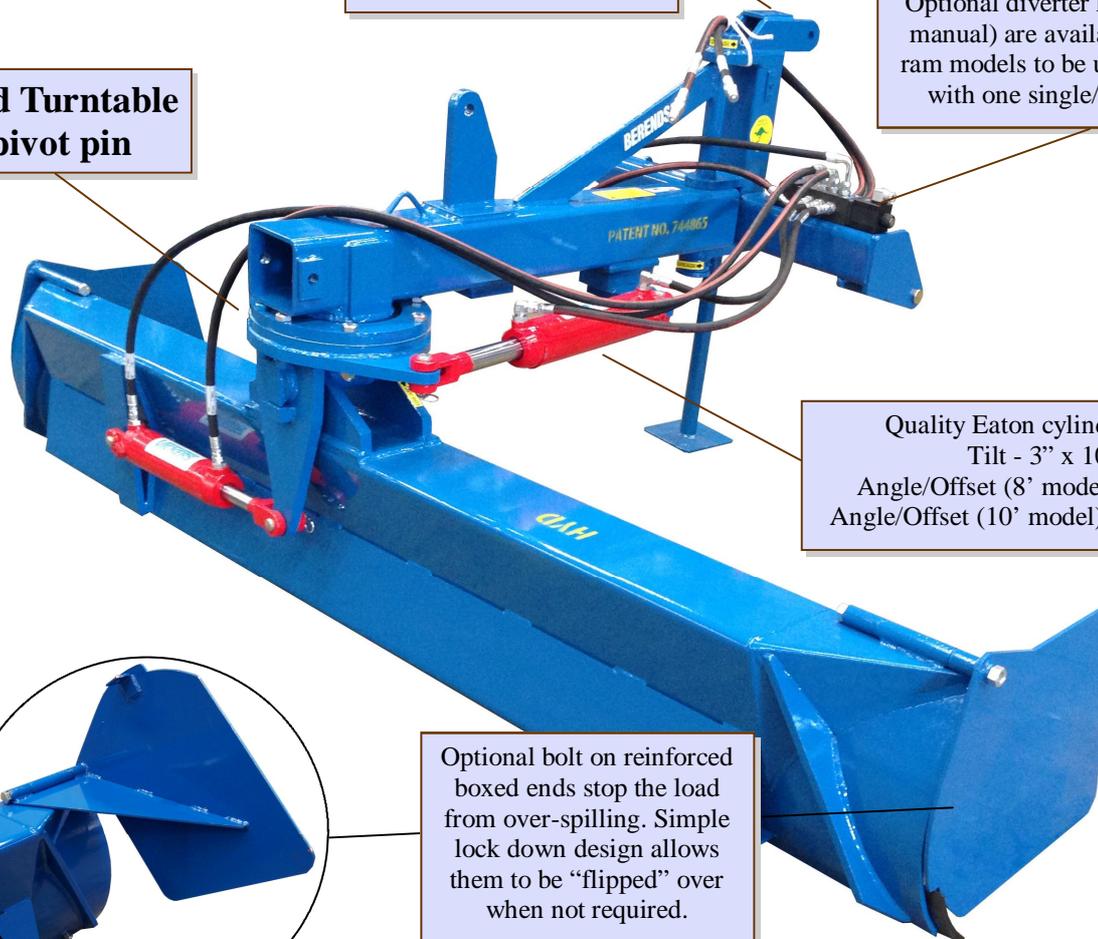

Quality Eaton cylinders used.
Tilt - 3" x 10"
Angle/Offset (8' model) - 3" x 12"
Angle/Offset (10' model) - 3 1/2" x 12"

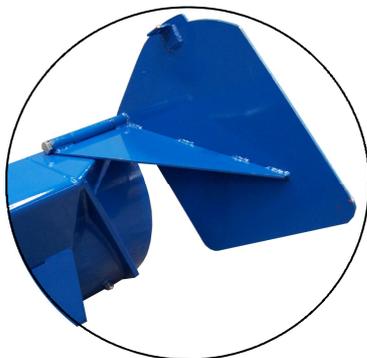

Optional bolt on reinforced boxed ends stop the load from over-spilling. Simple lock down design allows them to be "flipped" over when not required.

John Berends Implements Pty Ltd

130 Frankston-Dandenong Rd, Dandenong South, Vic. 3175

Ph: (03) 9791 2494 Fax: (03) 9794 5568

email: sales@johnberends.com.au www.johnberendsimplements.com.au

