

CONTRACTOR SLASHERS

Made in
Australia




5 YEAR
GEARBOX
WARRANTY

The Warrior

One of the strongest slashers on the market!

- Extra strong build 6mm top plate with exceptionally strong perimeter and centre tubular crossmembers - where it counts.
- Adjustable reinforced skids. **Contractor option** fitted with 'additional' runner for wear.
- Two-pack paint finish. **Contractor option** has hot dipped galvanised body.
- Headstock made from heavy angle and RHS and fitted with top link with either floating or fixed positioning. Optional chain stays available.
- Bondioli & Pavesi (Italian) Series 8 pto driveshaft with integrated 4 plate slip clutch protects slasher and tractor. An integrated clutch means less wear between the clutch and pto shaft.
- Unlimited HP oil lubricated Italian gearbox with unbreakable 90mm output shaft with **5 Year Manufacturers Warranty.**

SPECIFICATIONS

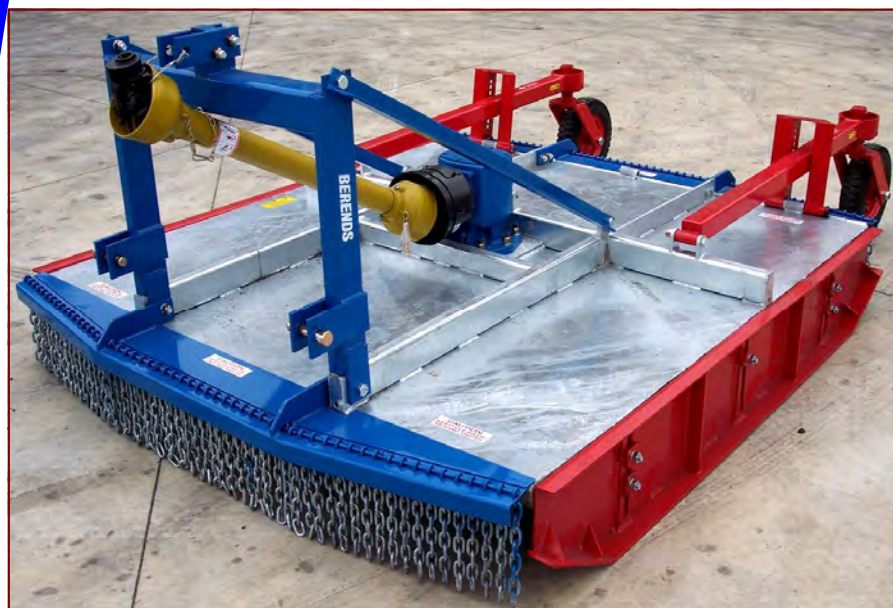

| Model | Warrior 180 | Warrior 210 |
|----------------|-------------|-------------|
| Cutting Width | 1750mm | 2050mm |
| Overall Width | 1960mm | 2200mm |
| Weight | 710kg | 755kg |
| Tractor HP | 100 + | 100 + |
| Cutting Height | 25-100mm | 25-100mm |

Manufactured for
Australian conditions
since 1966

- Twisted and stepped 75 x 16mm Boron slasher blades create an updraft effect which lifts the grass flattened by the tractor wheels. All bushes are through hardened. Made in Australia, the blades are hardened and tempered in the 40-45 Rockwell range. This range gives excellent hardness while delivering strength and fatigue resistance. Any harder and they potentially become brittle.
- Hardened and tempered spring steel rotor blade assembly. Bolt head protection allows easy changeover of blades.
- Dual puncture proof solid rubber wheelkits enable easy depth control. Standard with **contractor option.**
- Front and rear chain kits are standard with easy to replace chain pieces.
- Cat 2 three point linkage as standard.



John Berends Implements Pty Ltd

130 Frankston-Dandenong Rd, Dandenong South, Vic. 3175

Ph: (03) 9791 2494 Fax: (03) 9794 5568

email: berends@johnberends.com.au www.johnberendsimplements.com.au