



For Earth, For Life
Kubota

M

KUBOTA DIESEL TRACTOR MX5200

Available with HST, the Kubota MX5200 represents a powerful blend of versatility and functionality.



Note: This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.

Note: Pictured loaders are non mechanical self levelling U.S.A. models. Loaders available from Kubota Australia are mechanical self levelling models only.

MX *versatility, with the ease an*

Kubota's MX5200 utility tractor is designed to tackle almost any task. And with our HST model, those tasks just got easier. Experience the smooth performance and increased control of our MX HST model. With the net power of Kubota's 50HP engine, the MX5200 is a highly responsive workhorse, ready for tough jobs. Of course, our standard, "gear-drive" model provides the same reliable versatility you've come to know and expect from Kubota.



MX5200 *4WD HST model*




and convenience of HST.

**POWERFUL,
QUIET AND
CLEAN ENGINES**

Rev it up and get moving. The MX5200 offers 50.7 and 51.2 net engine horsepower. Our 5200 gear model delivers 45 PTO horsepower*, giving you the power to work more efficiently. These tractors feature a built-in balancer that helps minimize vibration and noise.

**HST model: 43.5 PTO horsepower*

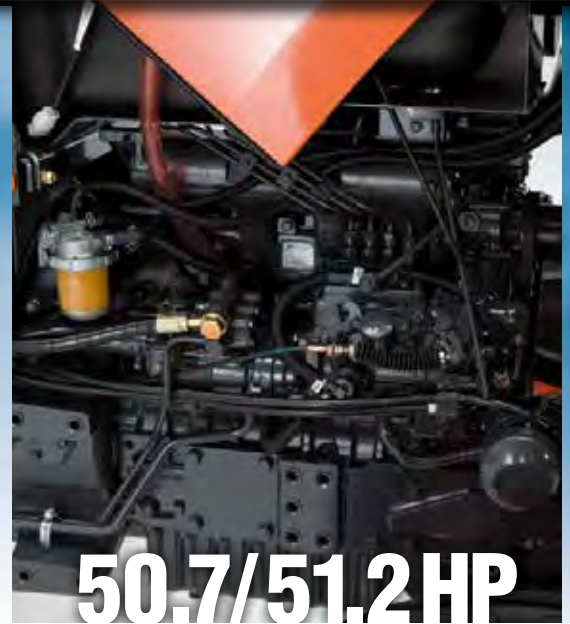

50.7/51.2HP

MX5200
4WD Gear model



Excellent operability, just the way smooth HST or responsive gear-



HST MODEL

Kubota's new MX5200 HST model features hydraulic servo systems that increase pedal responsiveness, providing easy pedal-shifting operation for smoother performance and improved control, regardless of load size. Forward and reverse directional changes are simple. HST also reduces shock, vibration, noise and fatigue to improve tractor performance and operator comfort.

Transmission Controls

Located on the left side of the tractor, the hand controls of our new HST model is both ergonomic and user friendly. It features a straight-line range gear-shift and a step-less cruise control, which keeps your working speed variation to a minimum, regardless of the terrain.




Full-open One-piece Bonnet

The MX5200 is equipped with a slanted bonnet, halogen headlights, and front grill for improved visibility and a sophisticated appearance. The full-opening one-piece bonnet features dual gas shock assist for easy opening, so you can perform routine maintenance quickly and efficiently, and get back to getting the job done.

Bevel Gear Front Axle

The 4WD provides outstanding pulling power and traction in almost any working condition, and features a bevel-gear front axle to deliver a smooth and full-power transfer, and greater all-around manoeuvrability.

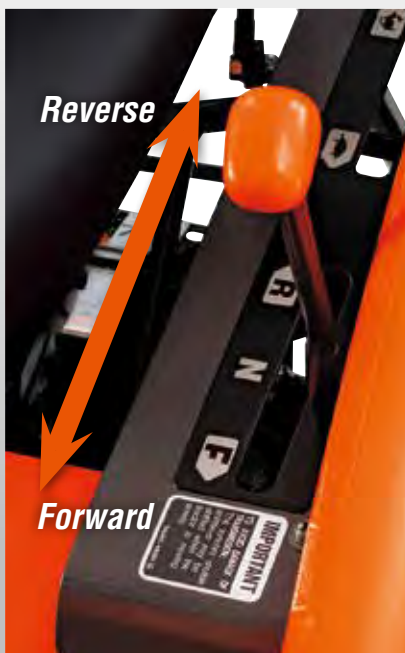


GEAR DRIVE TRANSMISSION

Kubota's Synchro Shuttle Transmission lets you spring into action with smooth operability and powerful agility. The hanging clutch and brake pedals deliver easy manoeuvrability when shifting. And, with 4 main shift speeds and 2 range-shift speeds (Hi/Lo), you have 8 forward and 8 reverse speeds to choose from, giving you the versatility you need to maximize your productivity.

Synchro Shuttle Shift

Conveniently located at the left side of the seat, this shuttle lever allows you to quickly and easily switch between forward and reverse. It's particularly handy when performing tasks that require repetitive forward/ reverse motions, like front loader work.



Partially synchronized main gear shift

...you want it; choose ...drive transmission.



Enhanced Operator Comfort

The full-flat deck enables safe and easy mounting/dismounting, and the 760 spacious millimetres between fenders gives you all the room you need to work in comfort. In addition, the easy-to-operate hanging pedals optimize legroom, and, for really thirsty work, the convenient cup holder will always keep your beverage within easy reach.

Power Steering

Make tight turns or take the straight path with the same smooth ease. These tractors feature responsive power steering to enhance manoeuvrability and make steering worry-free when a heavy load is applied or the front loader is used.

Performance-matched 3-point Hitch

Kubota's durable 3-point hitch is performance-matched to operate seamlessly with the MX5200. It features telescopic lower link ends and stabilisers to allow easy attachment of a wide variety of Category I and II rear-mounted implements, and offer enormous lift capacity.

Electric-Over Hydraulic PTO Switch

Our new PTO switch makes PTO operation easier than ever. Conveniently located on the right side console, push and turn starts and one push stops the PTO.



Note: The front loader frame is optional.

A productive front loader give you haul and move earth.



Protected Cylinder Tubes

1. Rounded Boom

The front loader features a rounded boom that matches the hood, for a sleek look and increased visibility during loader operations.

LA854AU-B FRONT LOADER

Kubota's front loader is performance-matched to the MX5200, ensuring precise operation and improved productivity. The high lift capacity and lift height deliver impressive performance with each load, and the single-lever joystick control makes operation easy. A standard 2-lever quick coupler is available for fast and easy attach/detach of attachments, such as buckets and bale spears, and the hydraulic tubes are enclosed within the rounded boom for protection and a tidy look.

LA854AU-B Front Loader Specifications

Matching Tractor		MX5200
Maximum Lift Height (Pivot pin)	mm	2863
Clearance w/Attachment Dump	mm	2255
Reach @ Maximum Height	mm	570
Maximum Dump Angle	deg.	45
Reach w/Attachment on Ground	mm	1919
Maximum Rollback Angle	deg.	43
Digging Depth (When Bucket is Level)	mm	177
Overall Height in Carry Position	mm	1410
Material Bucket Width/Weight	mm /kg	1830 / 150
Lift Capacity (500mm forward)	kg	800
Raising Time to Full Height w/out Load	sec.	4.4
Lowering Time w/out Load (powerdown)	sec.	2.8
Attachment Rollback Time	sec.	1.9
Attachment Dumping Time	sec.	1.5
Rated Flow	l/min	37



u the power to



Joystick Control



2-lever Quick Coupler



2. High-quality Cylinders

The LA854AU-B loader features high-quality, heavy-duty cylinders to bring more muscle to your loader work. The durable plating offers impressive pressure resistance and achieves superior rust protection.

3. Front Guard

The MX5200's front guard provides additional front-end protection and folds down for quick and easy hood access.

4. 4-bar Linkage

The 4-bar bucket linkage increases the rollback and dumping angle for quicker scooping and dumping.

5. Mechanical Self-Levelling

This standard feature allows the operator to raise or lower the loader boom while keeping the bucket level to the ground. This will help prevent spills when carrying soil or sand and will make pallet handling smooth and easy.

6. Third Function Valve (optional)

To broaden the scope and capabilities of your front loader applications, the LA854AU-B is available with a third function valve to operate attachments such as a 4 in 1 bucket.



Specifications

Model	MX5200 Gear 4WD				MX5200 HST 4WD						
Engine	V2403-M-T										
Type (Make: KUBOTA)	E-TVCS, Indirect injection, liquid cooled diesel										
Engine gross power	HP (kW)	53.7 (40)									
Engine net power	HP (kW)	51.2 (38.2)				50.7 (37.8)					
PTO power	HP (kW)	45 (33.6)				43.5 (32.4)					
No. of cylinders/Aspiration	4 / Turbocharged										
Total displacement	cc	2434									
Fuel tank capacity	l	48									
Air cleaner	Dry-dual element										
Alternator	Amp	45									
Transmission											
No. of speeds	8F/8R				3-range speed						
Main gear shift (4 speeds)	Partially synchronised (3rd & 4th)				-						
Shuttle	Synchronised				Hydrostatic pedal operate						
Main clutch	Dry single plate										
Brake	Mechanical wet disc										
Differential lock	Rear standard (mechanical)										
PTO											
PTO type	Live independent, hydraulic PTO with PTO brake, wet clutch										
Speed	540 rpm										
Hydraulics											
Pump capacity (main)	l	35.8									
Power steering	l	18.6									
3-point hitch	Category I & II										
Control system	Position (std), Draft (opt)										
Lift capacity at 24 in. behind lift point	kg	1050									
No. of remote valves	1 std, Maximum 3 (2 & 3 opt.)										
Tyres											
Standard ^(*)	Front/Rear	9.5 – 16/14.9 – 26									
Travelling speeds (w/std. Ag. tires)											
No. of speeds (at rated engine speed)			Forward		Reverse		Forward		Reverse		
First	Fifth	km/h	1.6	7.6	1.5	7.0	L: 0 to 6.0	L: 0 to 5.5			
Second	Sixth		2.2	10.8	2.1	9.9	M: 0 to 11.8	M: 0 to 10.6			
Third	Seventh		3.6	17.5	3.3	16.1	H: 0 to 25.9	H: 0 to 23.3			
Fourth	Eighth		5.4	25.9	4.9	23.7					
Other features											
4WD drive system	Bevel gear type										
Steering	Hydrostatic power type										
Bonnet type / Pedal type	Full open bonnet / Hanging pedals										
Deck type	Flat										
Dimensions & weight											
Overall length (w/o 3P)	mm	3245									
Overall height (top of ROPS)	mm	2430									
Overall width (Minimum)	mm	1770									
Wheelbase	mm	1895									
Min. ground clearance	mm	385									
Tread width	Front	mm	1325								
	Rear	mm	1375 – 1490								
Turning radius (w/ brake)	m	2.7									
Tractor weight	kg	1642				1712					

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in all applications.

(*)Kubota offers several tyre options.

Kubota

©2019 Kubota Corporation

Kubota Australia Pty Ltd

25-29 Permas Way, Truganina VIC, 3029 Australia
 Freecall: 1800-334-653
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

Kubota New Zealand Limited

Freecall: 0800-582-682
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.co.nz>

